

italica

INNOVATING TRENDS

GVT
COLLECTION
800x2400MM



**INSPIRED BY ITALY,
CRAFTED FOR INDIA.**

www.italicatiles.com



CLASS • CREATIVITY • COMMITMENT



Vision

To become the forerunner of innovation in the ceramic tile industry, setting the **global standard for** quality, artistry, and functionality, and becoming the preferred choice for enhancing living and working spaces worldwide.



Brand Promise

To craft ceramic tiles that represent our **core values of class,** creativity, and commitment, enhancing living and working environments with innovative designs and unparalleled quality.

Values

The corporate values governing Italice are not just words on paper;

they are a commitment

to our excellence and authenticity.



Integrity :

We uphold the highest standards of honesty and ethical behavior in all our business practices, ensuring fair treatment for our associates and partners.



Passion :

We are driven by a relentless pursuit of quality and innovation, aiming to exceed client expectations and serve consumers worldwide with dedication.



Perseverance :

In the face of challenges, we persist with determination and creativity, continuously striving to expand our presence and impact across the globe.



Punctuality :

Our commitment to timely delivery is unwavering. We streamline our processes to ensure products reach our customers promptly and efficiently.



Commitment :

We are devoted to meeting the diverse needs of our customers, constantly working to deliver satisfaction and build lasting relationships.



About Us

Established in 2004,

Italice Group was founded to bridge the gap in India for innovative designs, sophisticated surfaces, and high-quality tiles.

What started as a mission to bring

world-class design and quality

to Indian tiles has grown into a global journey,

one that now reaches over **1500+** clients across continents,

from boutique studios to architectural giants.

Italice has always achieved milestones by developing innovative products.

It offers different products from traditional to contemporary, aesthetically striking to ergonomically practical; suitable for all types of applications ranging from residential, commercial spaces to institutions and more.

Designed in
ITALY 

Inspired by the eternal forms of classical art,
our new collection blends timeless heritage with

Modern Innovation.

We've captured the soul of iconic beauty
and infused it with a clean,

Modern Aesthetic.

Our philosophy

GLOBAL INDIA'S 
ART to HEART

defines our creative essence.

At Italica Tiles,

we bring the world's finest design
inspirations from Italian elegance to
Japanese minimalism into Indian homes.

We don't just import beauty; we
reinterpret it through Indian
craftsmanship. Each tile becomes a
canvas where global artistry meets
the warmth, tradition, and

vibrancy of Indian living.

Product Feature

Crafted with precision and innovation, our tiles **combine strength, style and sustainability.**

Featuring superior stain, scratch, and water resistance, they offer lasting beauty and easy maintenance. Designed to elevate every space with elegance, durability, and modern aesthetics.



Low Water Absorption



Chemical Resistance



Slip Resistance



Scratch Resistance



Thermal Shock Resistance



Dimensional Precision



High Modulus of Rupture



Frost Resistance



Low Thermal Expansion



Resistance to Stains



TRUSTED
WORLDWIDE

85+

Countries
We Export

2500+


Unique
Designs

1500+


National & International
Clients

2000+

Employees
Worldwide

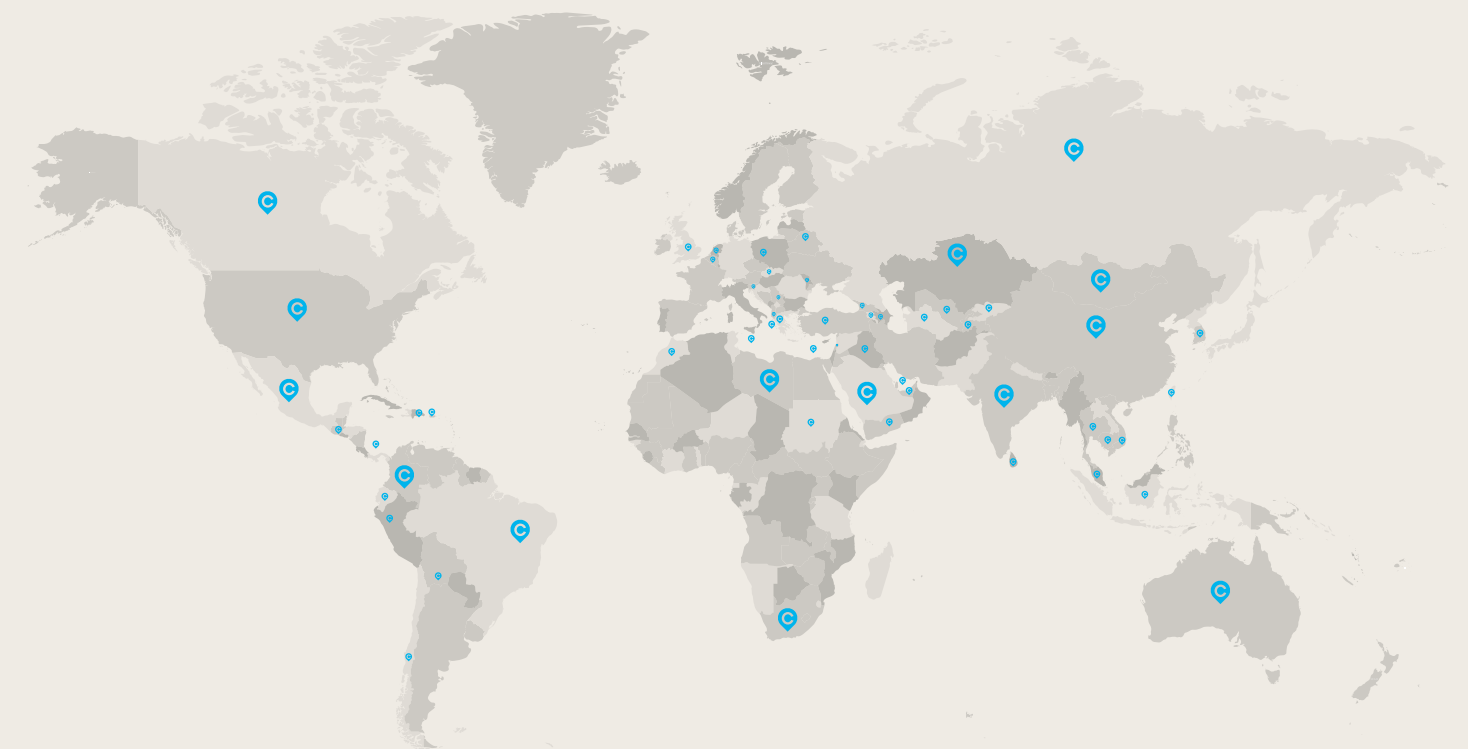

Albania	Chile	Israel	Moldova	Saudi Arabia	Taiwan
Armenia	Colombia	Jordan	Morocco	Serbia	Thailand
Australia	Dominican Republic	Kazakhstan	Netherlands	Singapore	Turkey
Azerbaijan	Ecuador	Kosovo	Oman	Slovakia	Turkmenistan
Belgium	Georgia	Kyrgyzstan	Panama	Slovenia	U.A.E.
Belarus	Greece	Lebanon	Peru	South Africa	U.K.
Bhutan	Guatemala	Libya	Poland	South Korea	U.S.A.
Bolivia	Hungary	Macedonia	Puerto Rico	Spain	Uzbekistan
Brazil	Indonesia	Malta	Qatar	Sri Lanka	Vietnam
Canada	Iraq	Mexico	Russia	Tajikistan	Yemen



800x2400mm

Index

	Oro Nero Nutech (Special)		Sago Barley Nutech (Basic)		Grany Grey Matt (Basic)
	Oro Nero Polished (Special)		Sago Barley Polished (Basic)		Grany Grey Polished (Basic)
	Oro White Nutech (Special)		Sago Crema Nutech (Basic)		Royal Quartz Polished
	Oro White Polished (Special)		Sago Crema Polished (Basic)		Glacier White Polished
	Oro Grey Nutech (Basic)		Sago Charcoal Nutech (Basic)		White Polished (Basic)
	Oro Grey Polished (Basic)		Sago Charcoal Polished (Basic)		Black Polished (Special)
	Oro Caramel Nutech (Basic)		Grany Black Matt (Special)		Verde Matt (Basic)
	Oro Caramel Polished (Basic)		Grany Black Polished (Special)		Verde Polished (Basic)
	Oro Crema Nutech (Basic)		Grany Walnut Matt (Special)		Amber Matt (Basic)
	Oro Crema Polished (Basic)		Grany Walnut Polished (Special)		Amber Polished (Basic)
	Sago Choco Nutech (Special)		Grany White Matt (Special)		Graphite Grey Matt (Basic)
	Sago Choco Polished (Special)		Grany White Polished (Special)		Graphite Grey Polished (Basic)
	Sago White Nutech (Special)		Grany Crema Matt (Basic)		Steel Grey Matt (Basic)
	Sago White Polished (Special)		Grany Crema Polished (Basic)		Steel Grey Polished (Basic)
	Sago Nero Nutech (Special)		Grany Caramel Matt (Basic)		Glitty Black Matt (Special)
	Sago Nero Polished (Special)		Grany Caramel Polished (Basic)		Crystal White Polished

Oro Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

ORO NERO (NUTECH SPECIAL)

FULL BODY

NEW



Oro Series

800x2400mm

BACK TO
INDEX




italica
INNOVATING TRENDS

ORO NERO (POLISHED SPECIAL)

FULL BODY

NEW

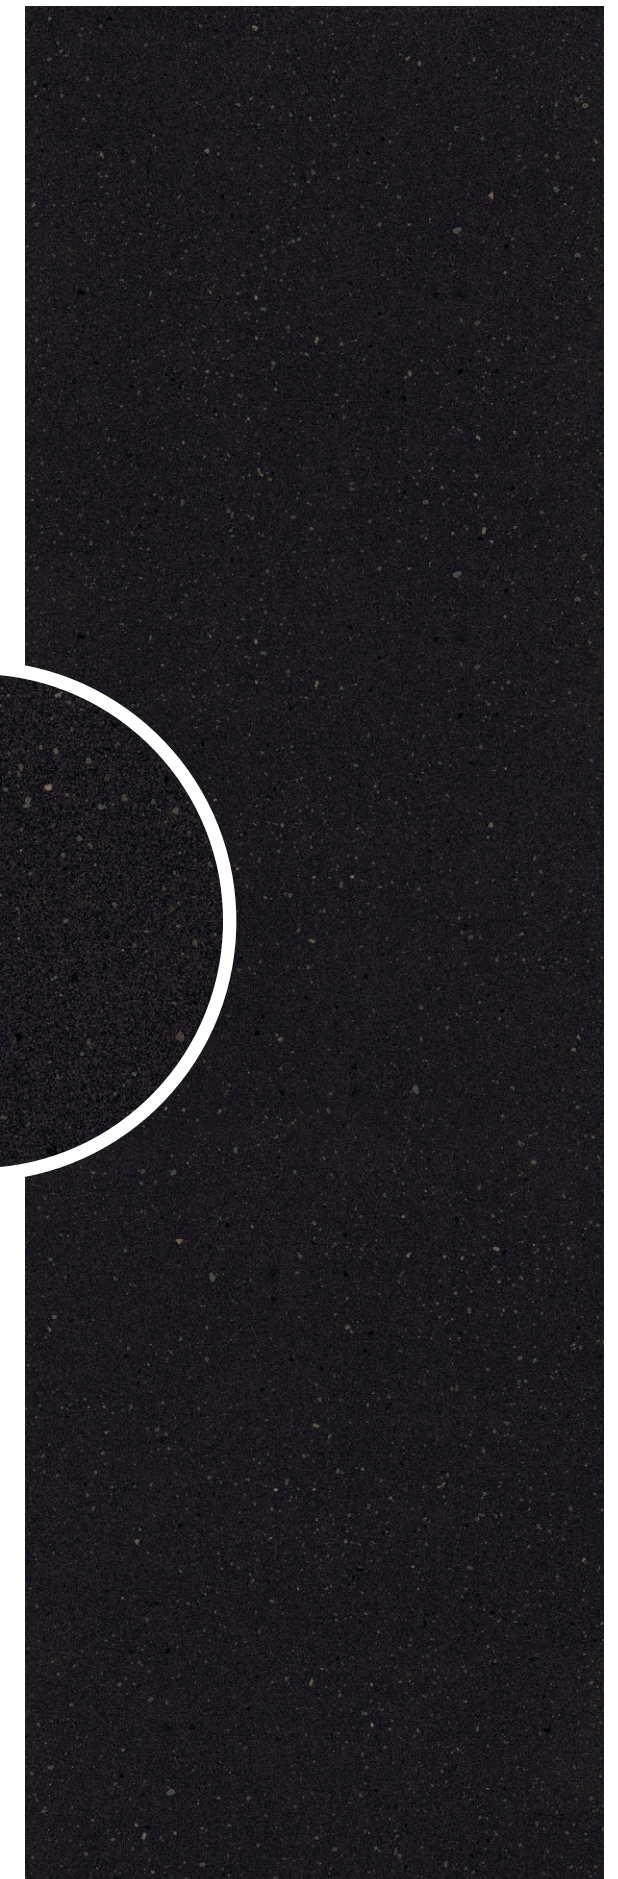

Oro Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

ORO WHITE (NUTECH SPECIAL)

FULL BODY

NEW



Oro Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

ORO WHITE (POLISHED SPECIAL)

FULL BODY

NEW



Oro Series

800x2400mm

BACK TO
INDEX





italica
INNOVATING TRENDS

ORO GREY (NUTECH BASIC)

FULL BODY

NEW

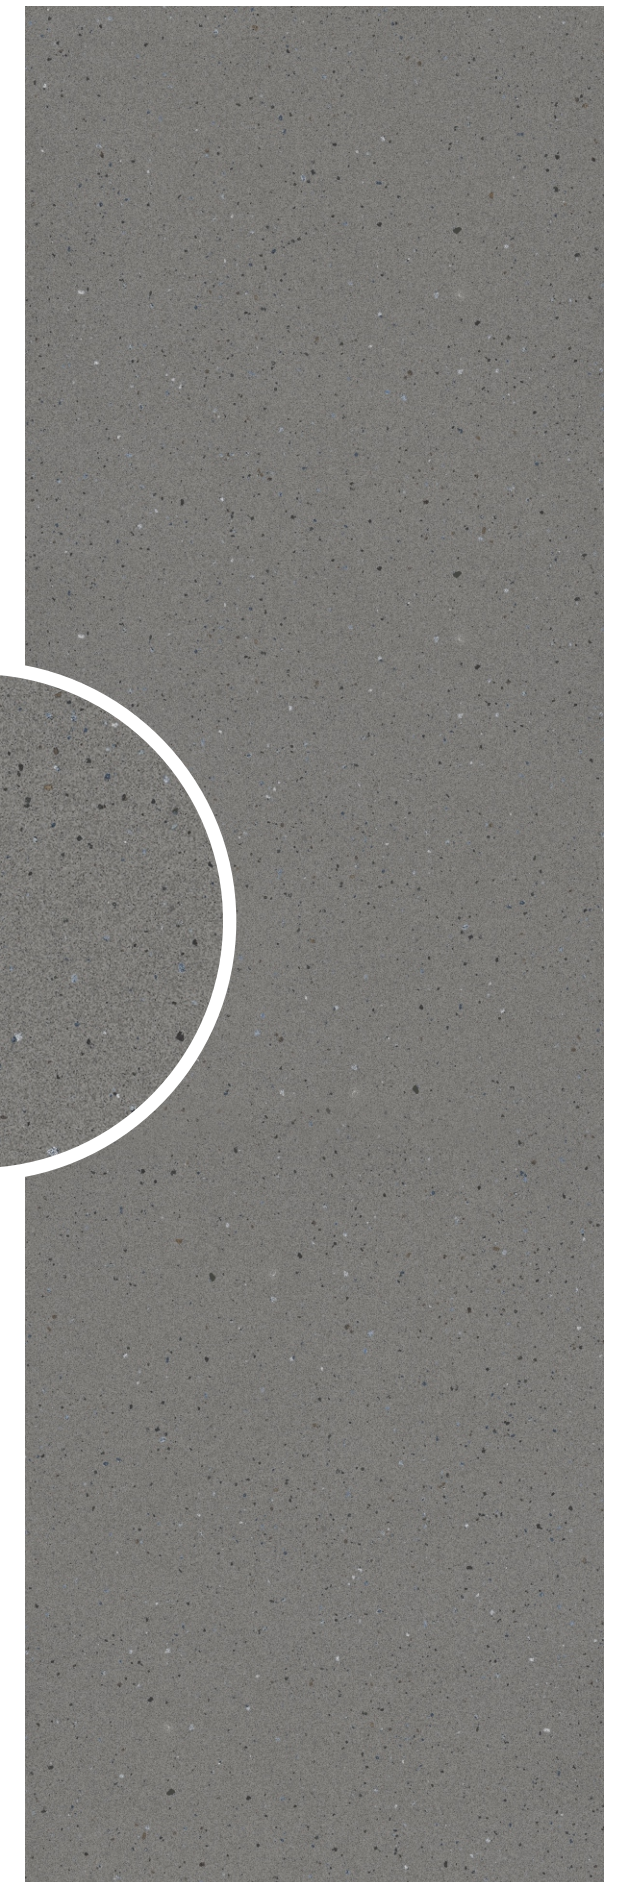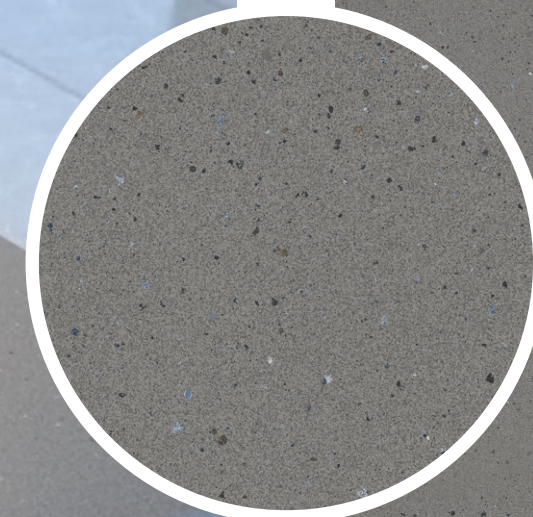

Oro Series

800x2400mm

BACK TO
INDEX




italica
INNOVATING TRENDS

ORO GREY (POLISHED BASIC)

FULL BODY

NEW

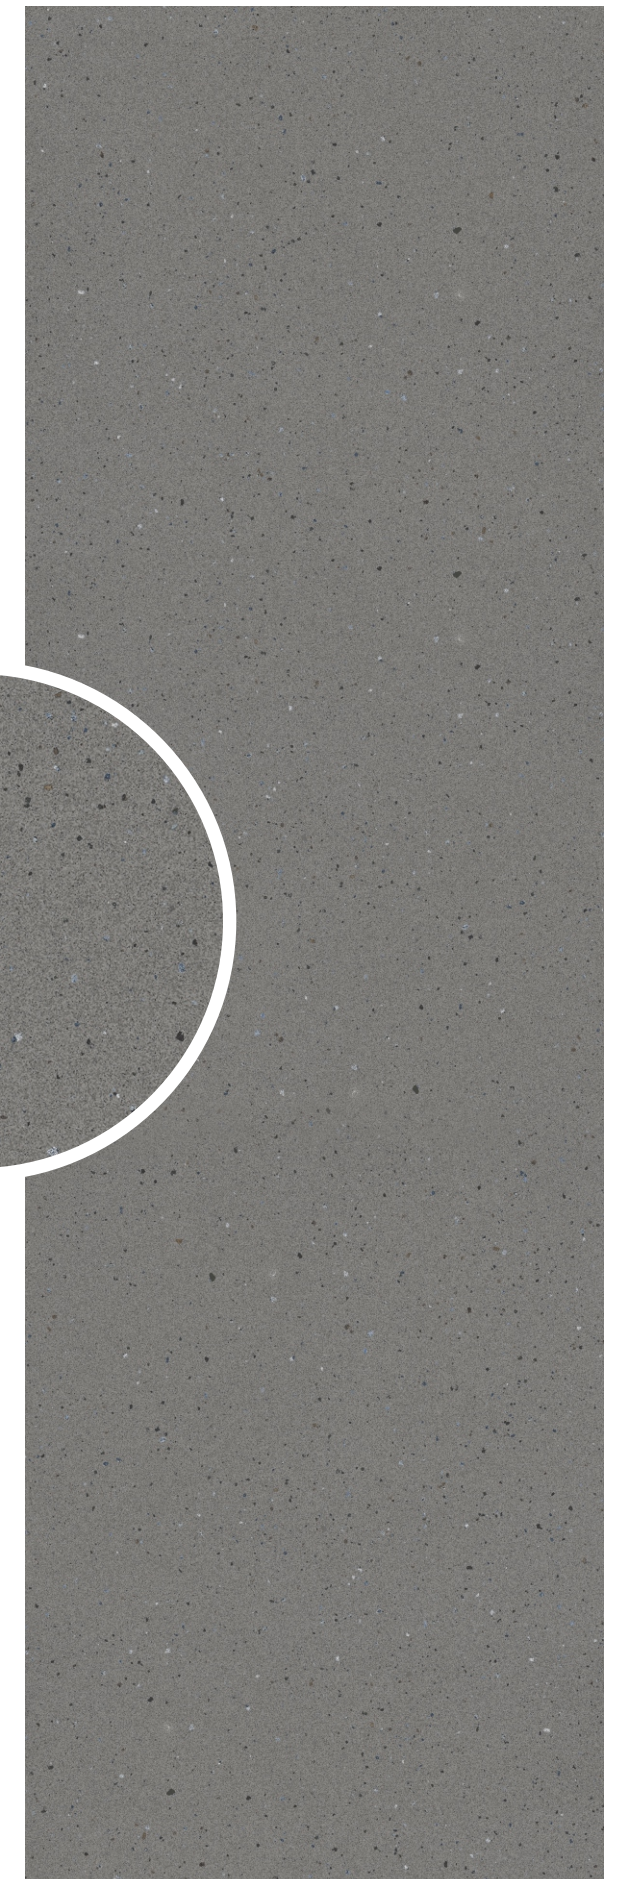

Oro Series

800x2400mm

BACK TO
INDEX




italica
INNOVATING TRENDS

ORO CARAMEL (NUTECH BASIC)

FULL BODY

NEW

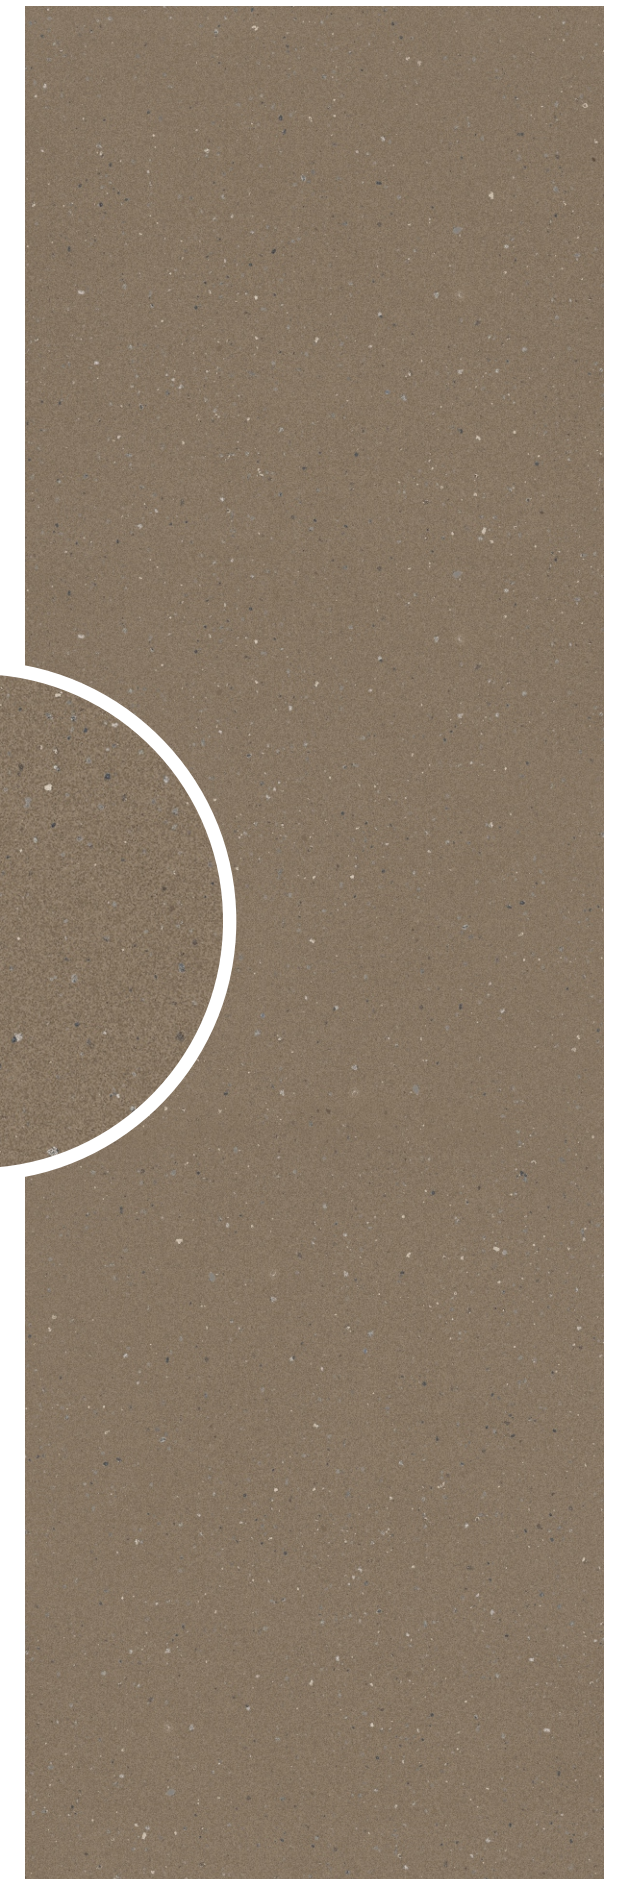

Oro Series

800x2400mm

BACK TO
INDEX





italica
INNOVATING TRENDS

ORO CARAMEL (POLISHED BASIC)

FULL BODY

NEW

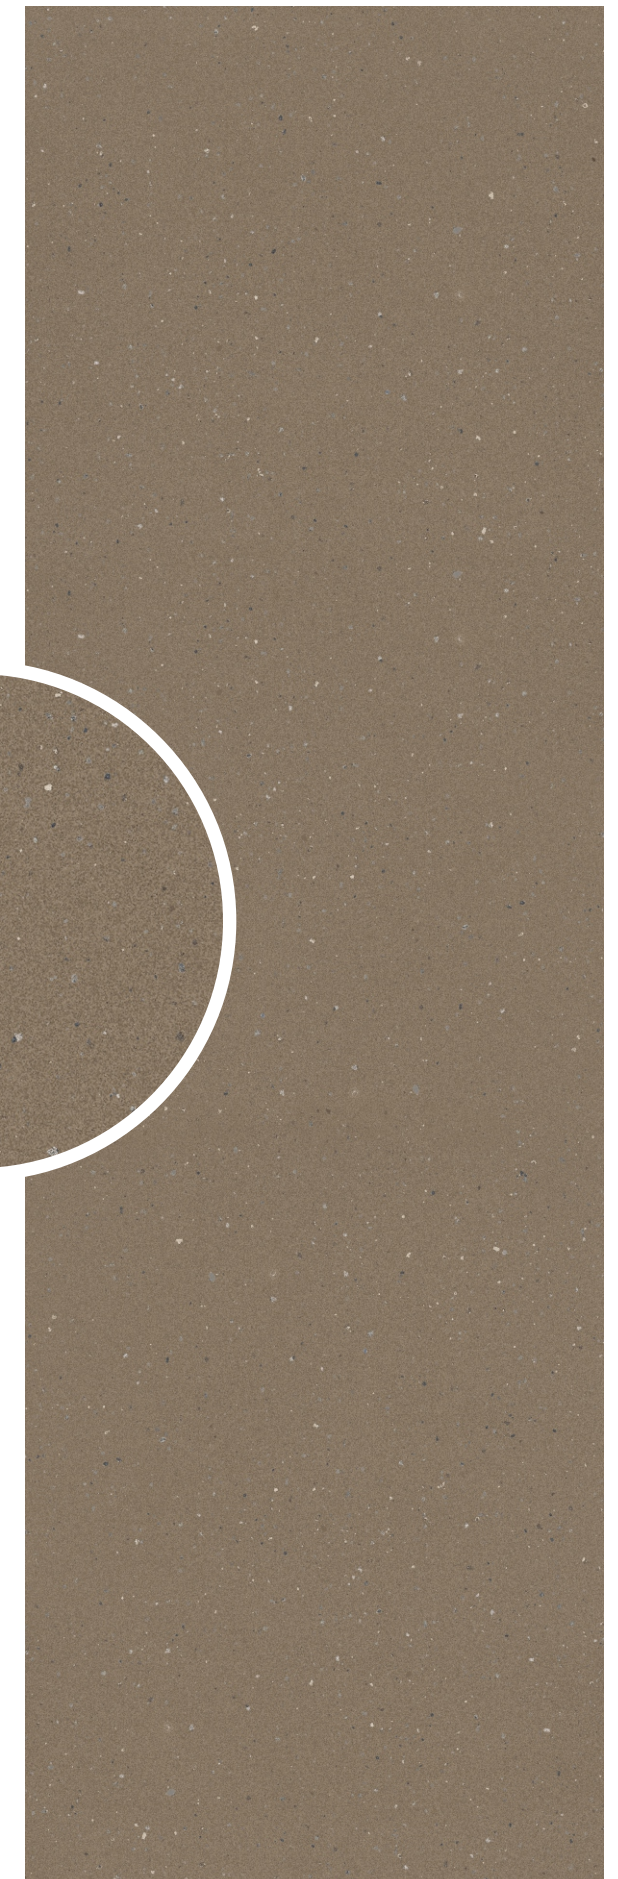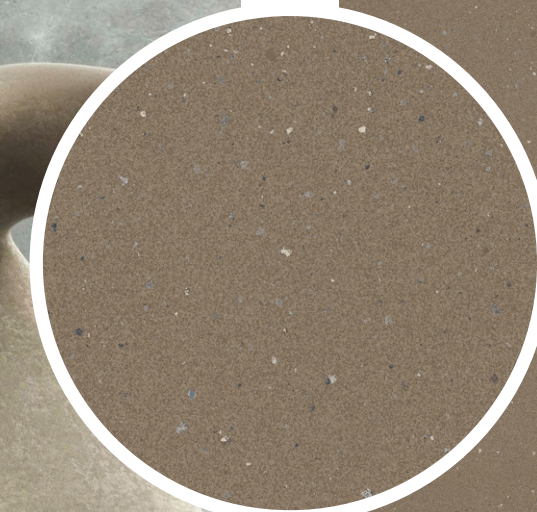

Oro Series

800x2400mm

BACK TO
INDEX




italica
INNOVATING TRENDS

ORO CREMA (NUTECH BASIC)

FULL BODY

NEW

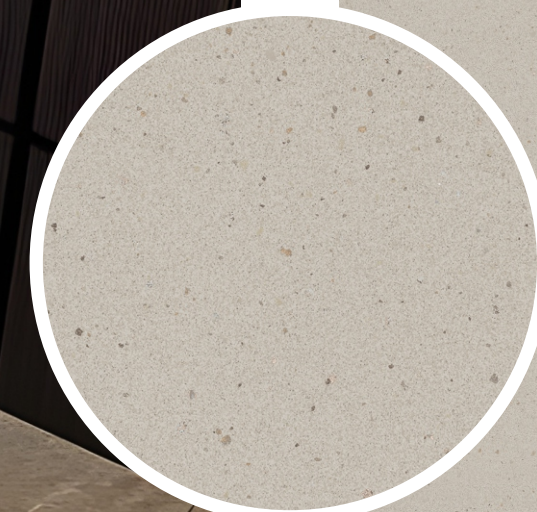

Oro Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

ORO CREMA (POLISHED BASIC)

FULL BODY

NEW



Sago Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

SAGO CHOCO (NUTECH SPECIAL)

FULL BODY



Sago Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

SAGO CHOCO (POLISHED SPECIAL)

FULL BODY



Sago Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

SAGO WHITE (NUTECH SPECIAL)

FULL BODY



Sago Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

SAGO WHITE (POLISHED SPECIAL)

FULL BODY



Sago Series

800x2400mm


BACK TO
INDEX



italica
INNOVATING TRENDS

SAGO NERO (NUTECH SPECIAL)

FULL BODY

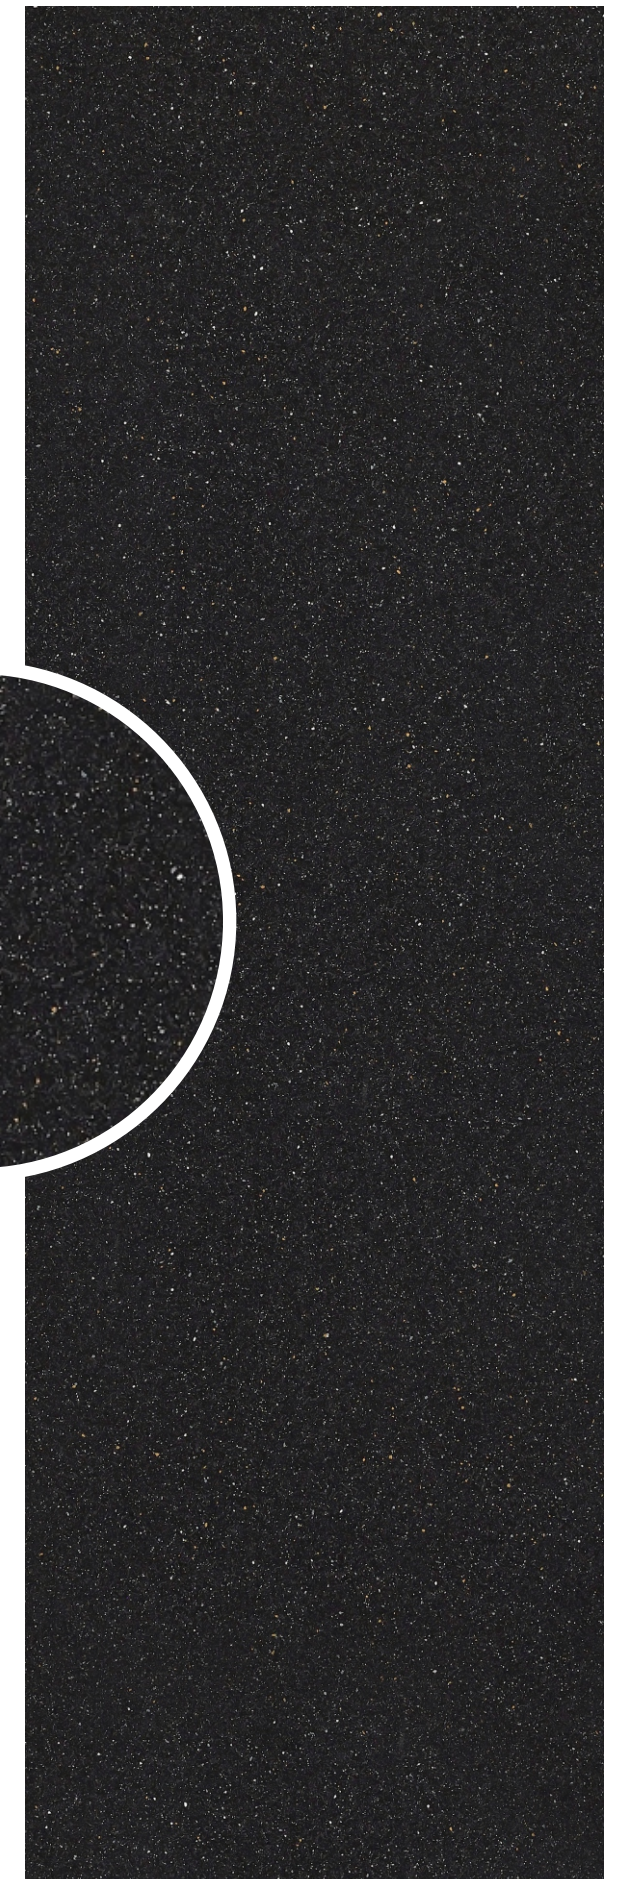

Sago Series

800x2400mm


BACK TO
INDEX



italica
INNOVATING TRENDS

SAGO NERO (POLISHED SPECIAL)

FULL BODY

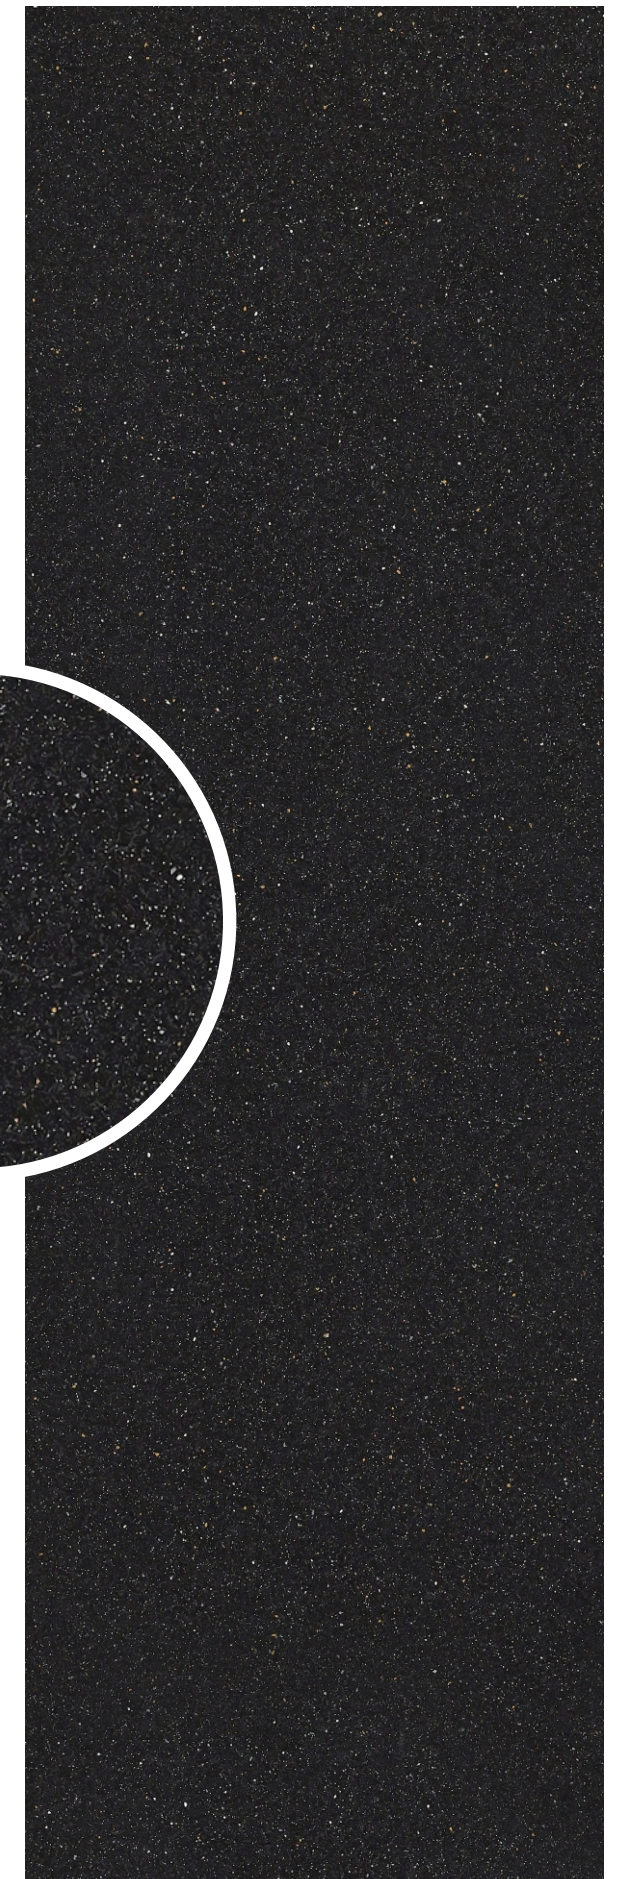

Sago Series

800x2400mm


BACK TO
INDEX



italica
INNOVATING TRENDS

SAGO BARLEY (NUTECH BASIC)

FULL BODY

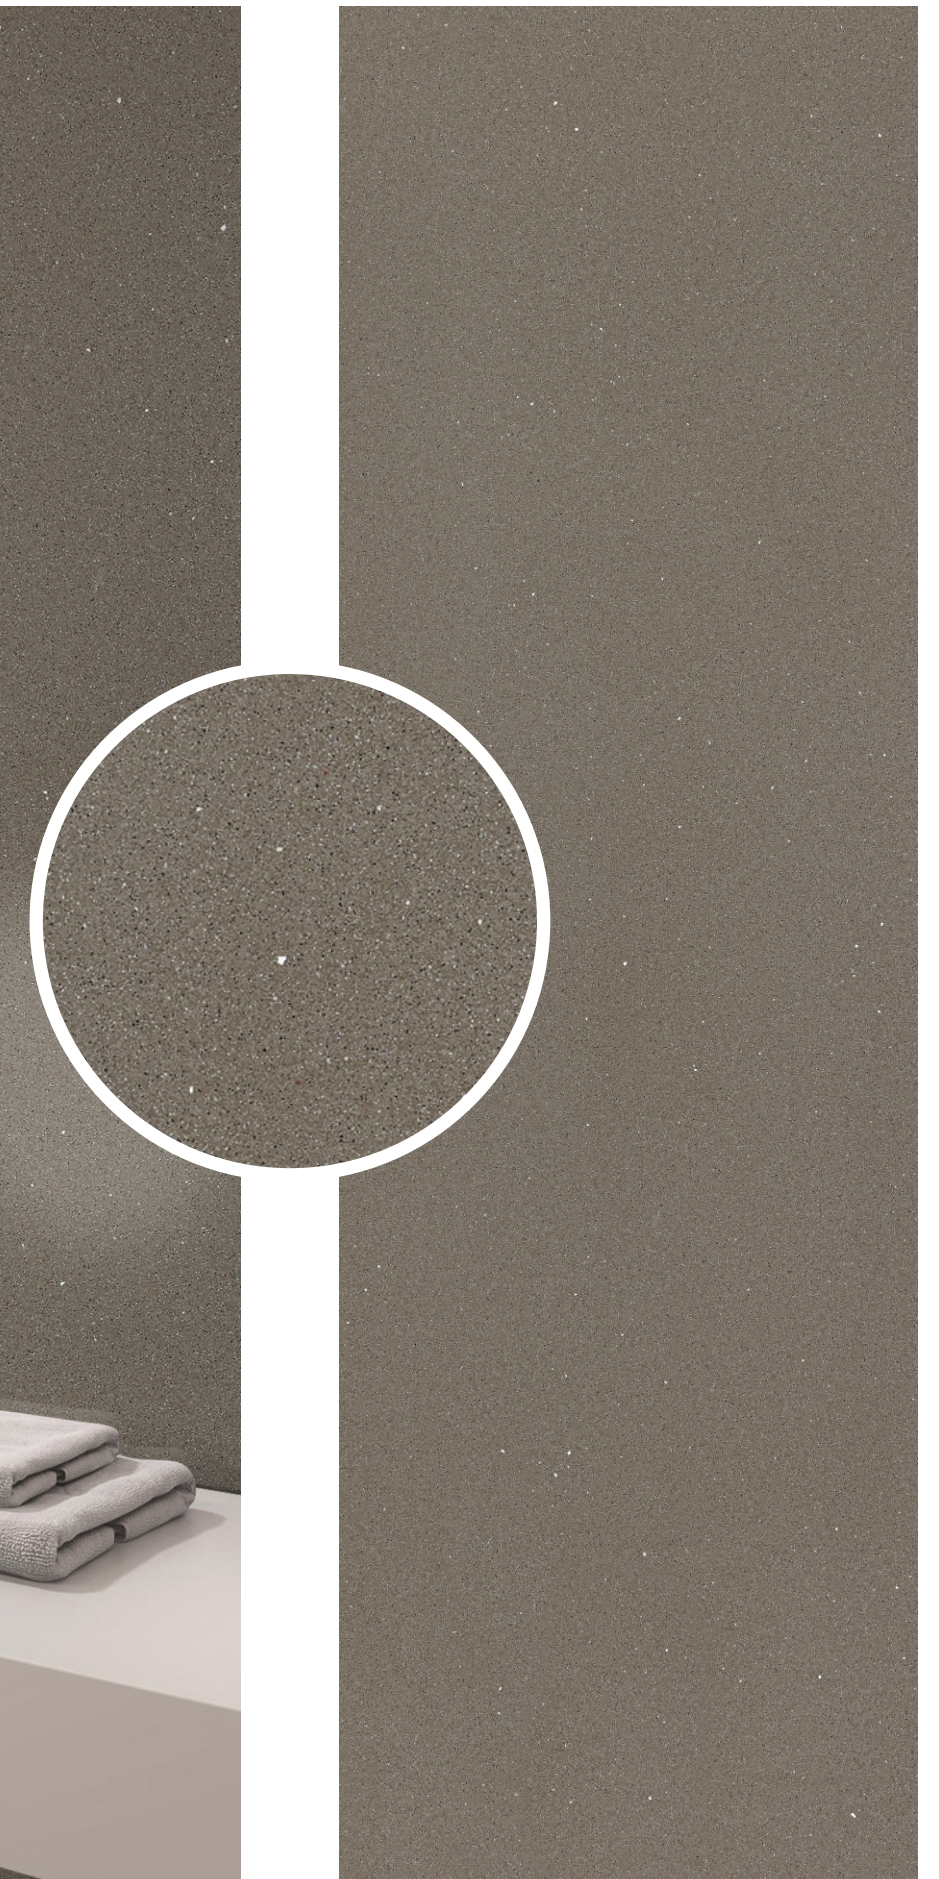

Sago Series

800x2400mm



BACK TO
INDEX



italica
INNOVATING TRENDS

SAGO BARLEY (POLISHED BASIC)

FULL BODY

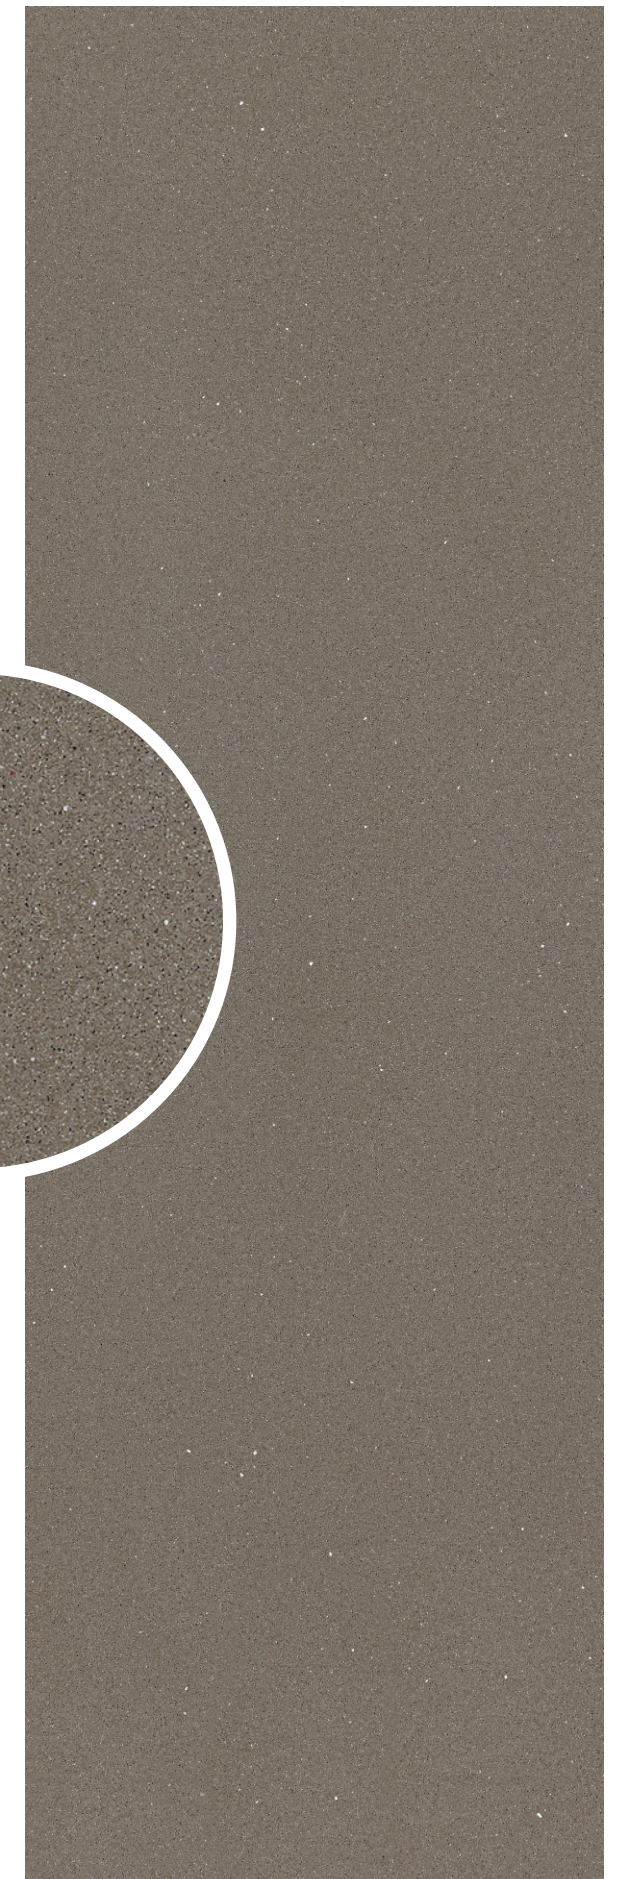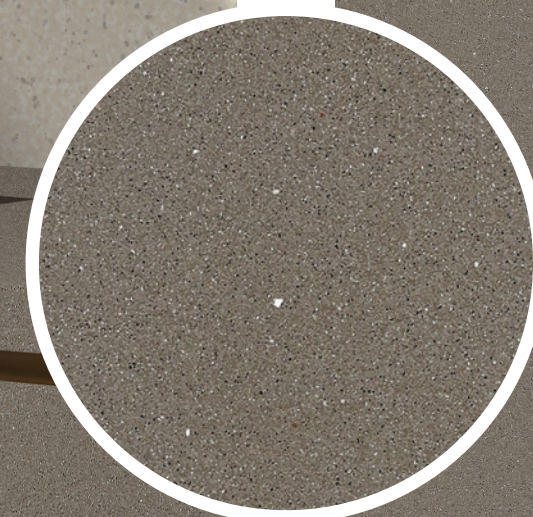

Sago Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

SAGO CREMA (NUTECH BASIC)

FULL BODY



Sago Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

SAGO CREMA (POLISHED BASIC)

FULL BODY



Sago Series

800x2400mm


BACK TO
INDEX



italica
INNOVATING TRENDS

SAGO CHARCOAL (NUTECH BASIC)

FULL BODY

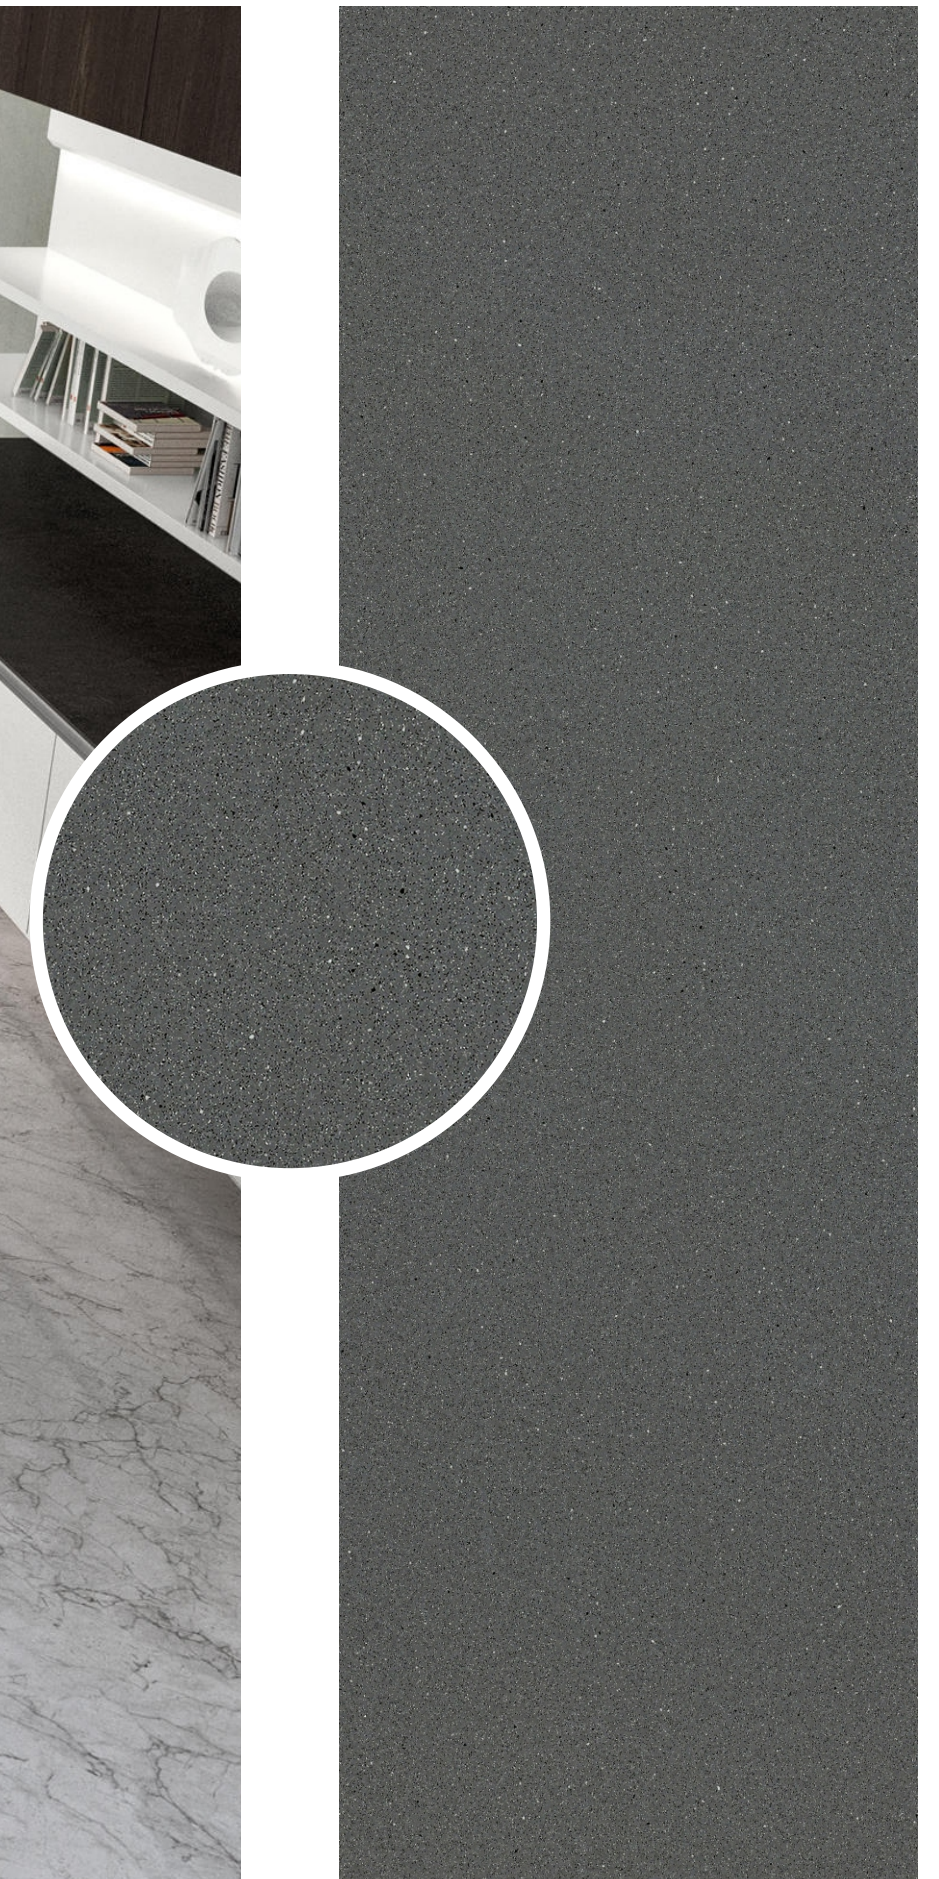

Sago Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

SAGO CHARCOAL (POLISHED BASIC)

FULL BODY



Grany Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

GRANY BLACK (MATT SPECIAL)

FULL BODY



Grany Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

GRANY BLACK (POLISHED SPECIAL)

FULL BODY



Grany Series

800x2400mm

BACK TO INDEX | 

italica
INNOVATING TRENDS

GRANY WALNUT (MATT SPECIAL)

FULL BODY



Grany Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

GRANY WALNUT (POLISHED SPECIAL)

FULL BODY



Grany Series

800x2400mm


BACK TO
INDEX



italica
INNOVATING TRENDS

GRANY WHITE (MATT SPECIAL)

FULL BODY

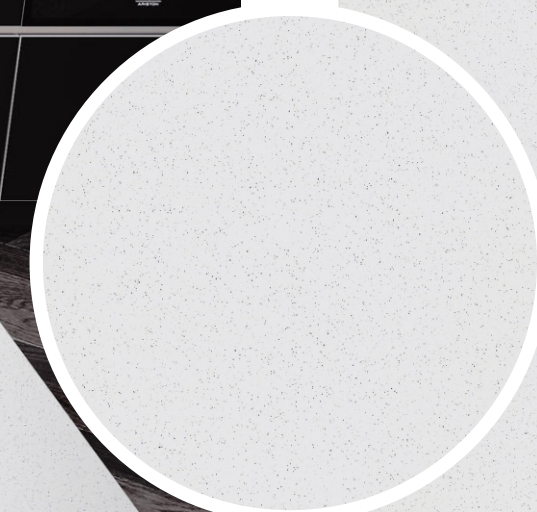

Grany Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

GRANY WHITE (POLISHED SPECIAL)

FULL BODY



Grany Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

GRANY CREMA (MATT BASIC)

FULL BODY



Grany Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

GRANY CREMA (POLISHED BASIC)

FULL BODY



Grany Series

800x2400mm


BACK TO
INDEX



italica
INNOVATING TRENDS

GRANY CARAMEL (MATT BASIC)

FULL BODY

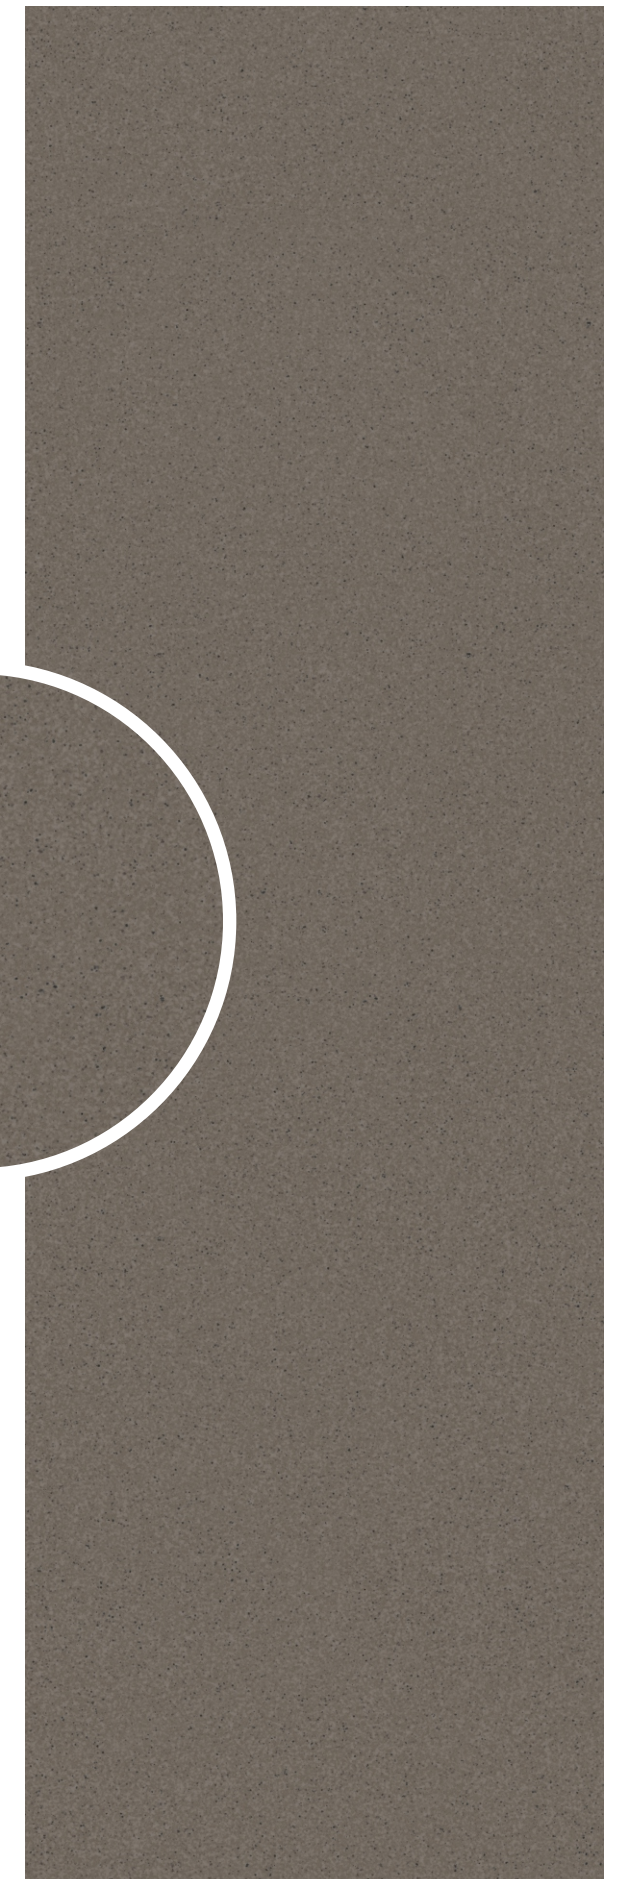

Grany Series

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

GRANY CARAMEL (POLISHED BASIC)

FULL BODY



Grany Series

800x2400mm

BACK TO INDEX | 

italica
INNOVATING TRENDS

GRANY GREY (MATT BASIC)

FULL BODY



Grany Series

800x2400mm


BACK TO
INDEX



italica
INNOVATING TRENDS

GRANY GREY (POLISHED BASIC)

FULL BODY

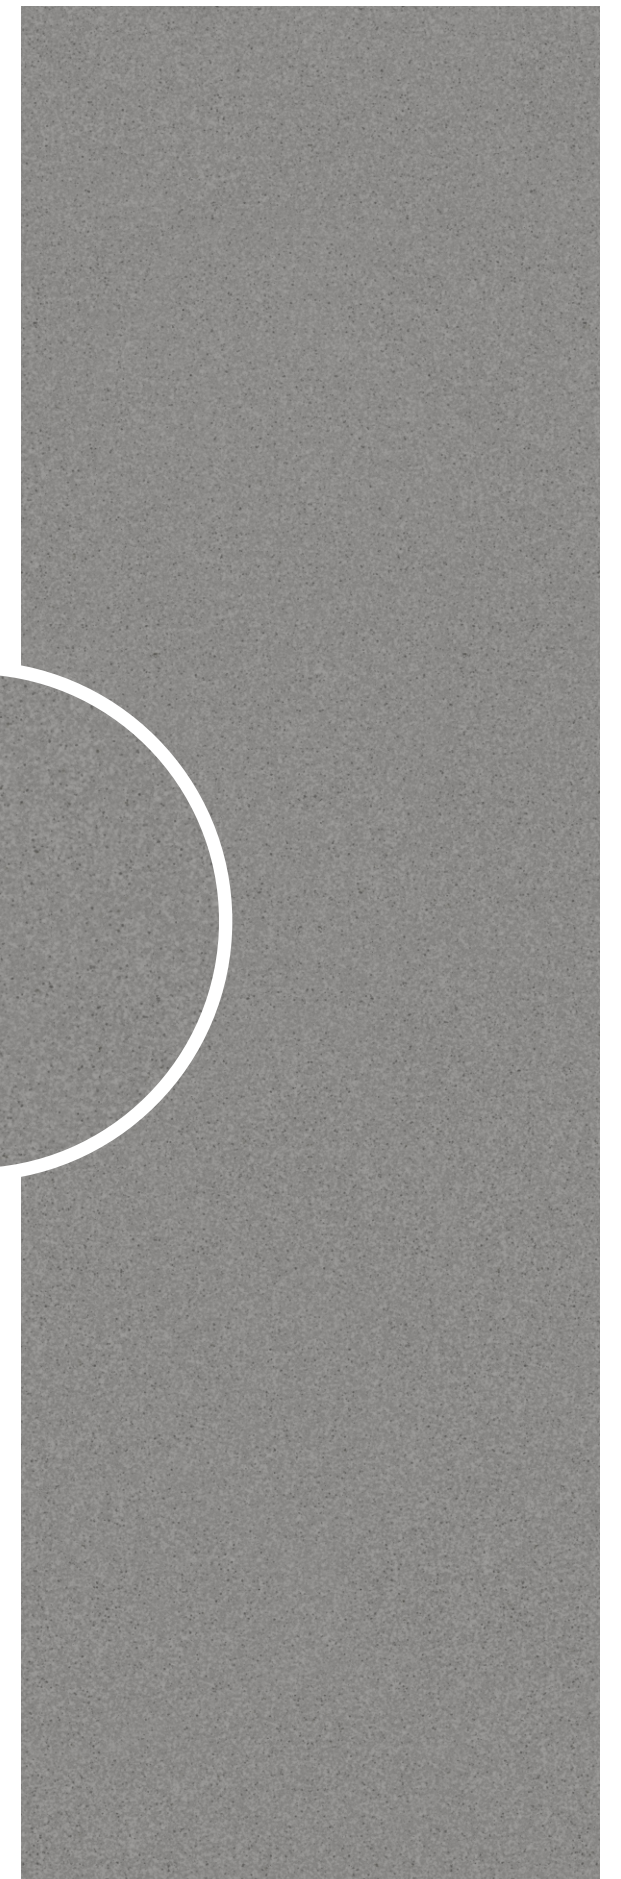

Polished
800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

ROYAL QAURTZ

FULL BODY



Polished

800x2400mm

BACK TO
INDEX




italica
INNOVATING TRENDS

GLACIER WHITE

FULL BODY

NEW

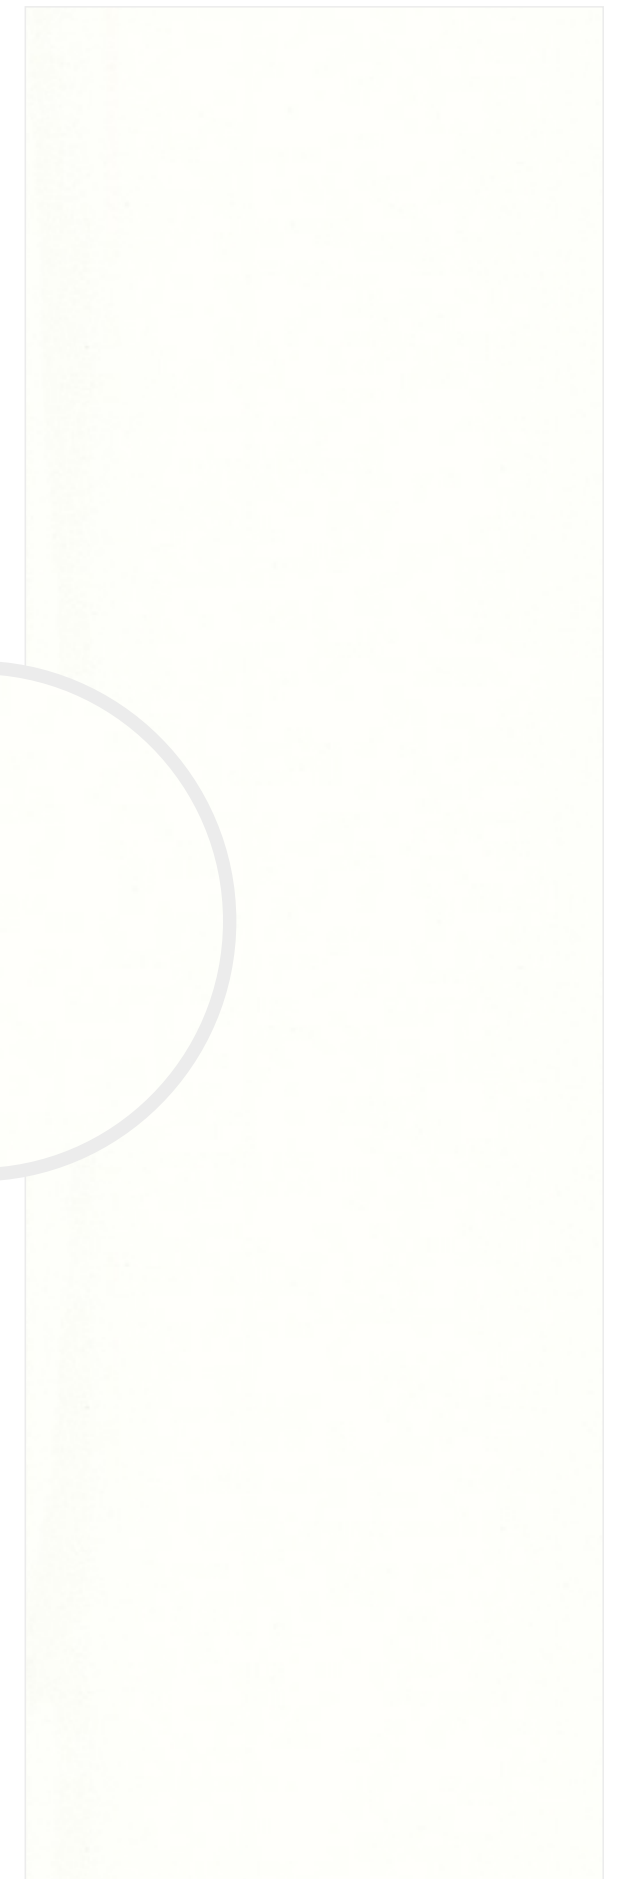

Polished

800x2400mm


BACK TO
INDEX



italica
INNOVATING TRENDS

WHITE (BASIC)

FULL BODY

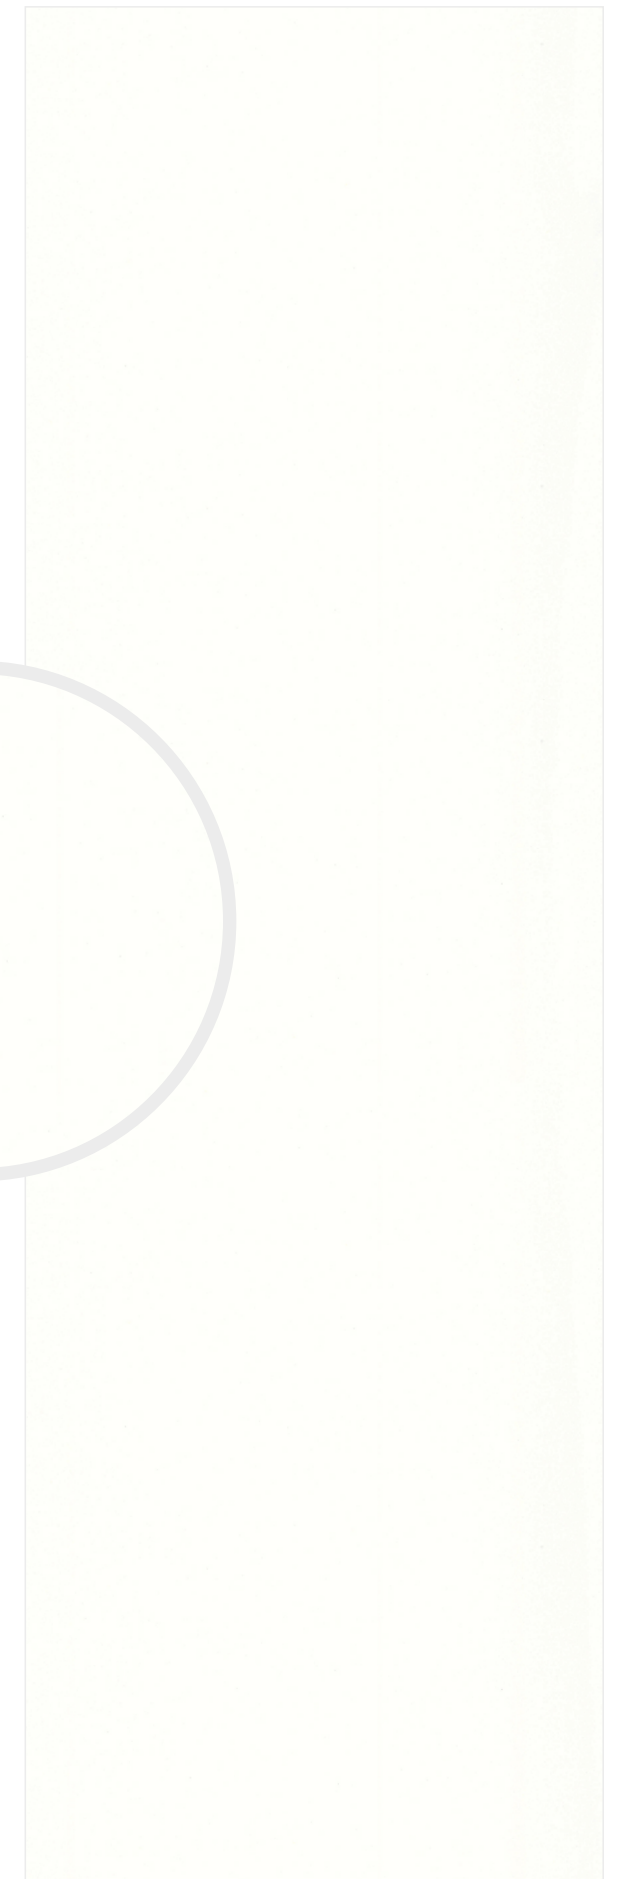

Polished

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

BLACK (SPECIAL)

FULL BODY



MATT
800x2400mm

BACK TO
INDEX




italica
INNOVATING TRENDS

VERDE (BASIC)

FULL BODY

NEW

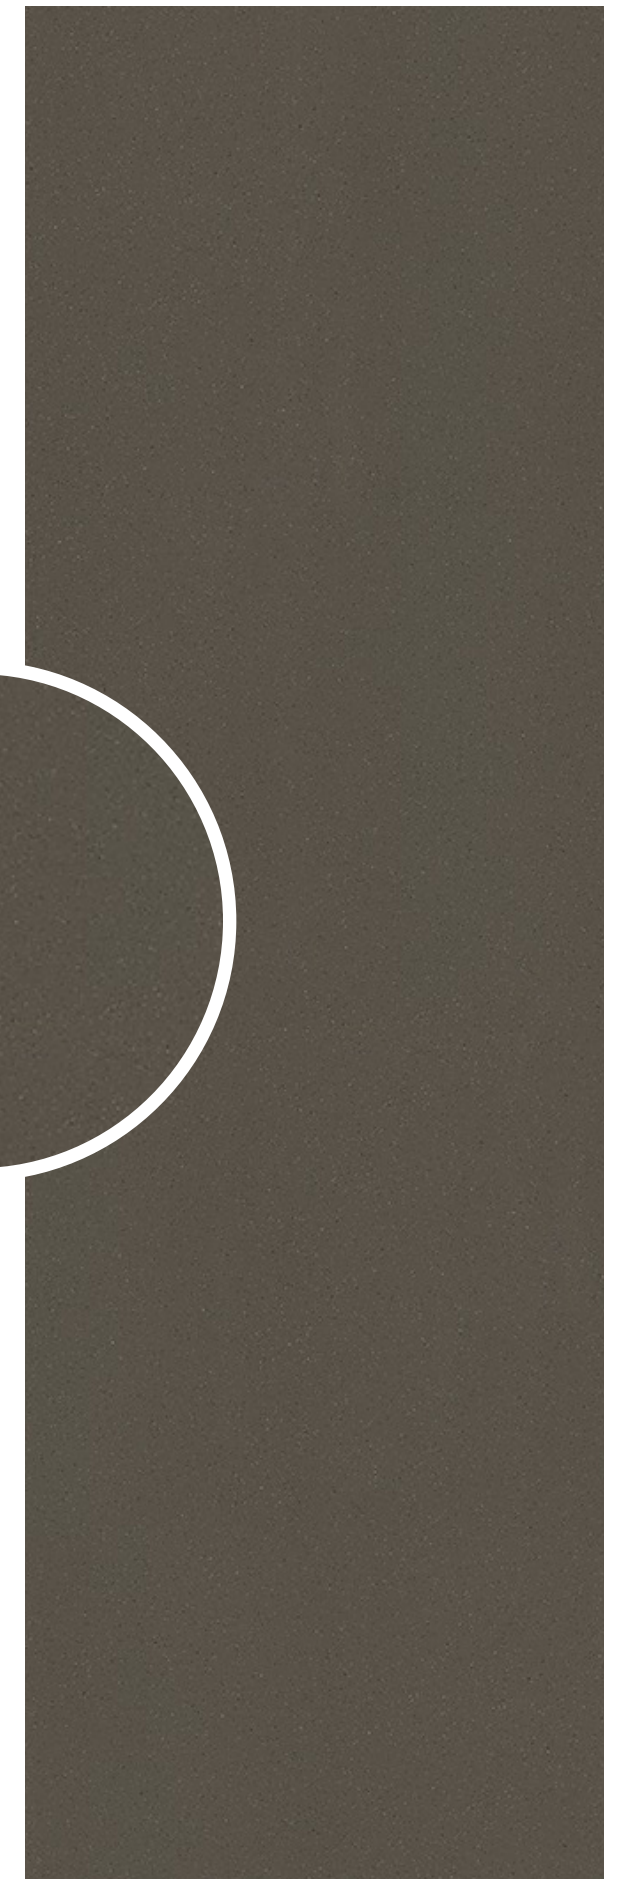

POLISHED

800x2400mm

BACK TO
INDEX




italica
INNOVATING TRENDS

VERDE (BASIC)

FULL BODY

NEW

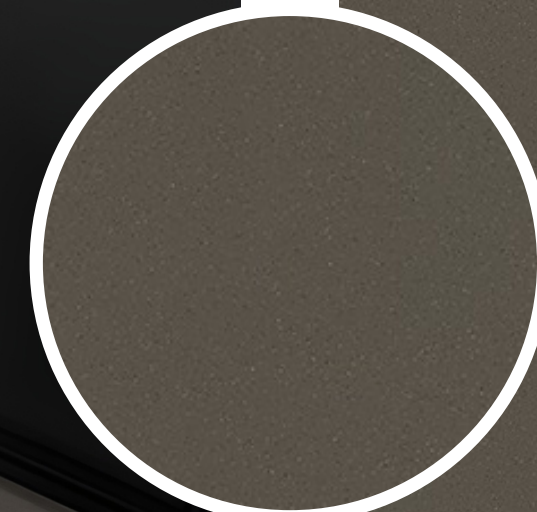

MATT

800x2400mm

BACK TO
INDEX




italica
INNOVATING TRENDS

AMBER (BASIC)

FULL BODY

NEW

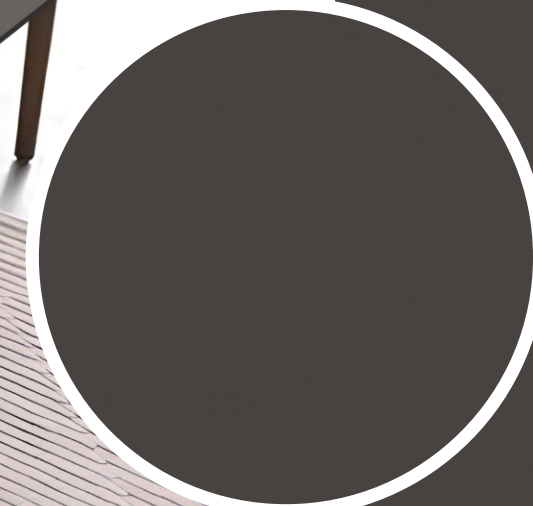

Polished

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

AMBER (BASIC)

FULL BODY

NEW



Matt

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

GRAPHITE GREY (BASIC)

FULL BODY



Polished

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

GRAPHITE GREY (BASIC)

FULL BODY



Matt

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

STEEL GREY (BASIC)

FULL BODY



Polished

800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

STEEL GREY (BASIC)

FULL BODY



Matt
800x2400mm


BACK TO
INDEX



italica
INNOVATING TRENDS

GLITTY BLACK (SPECIAL)

COLOR BODY

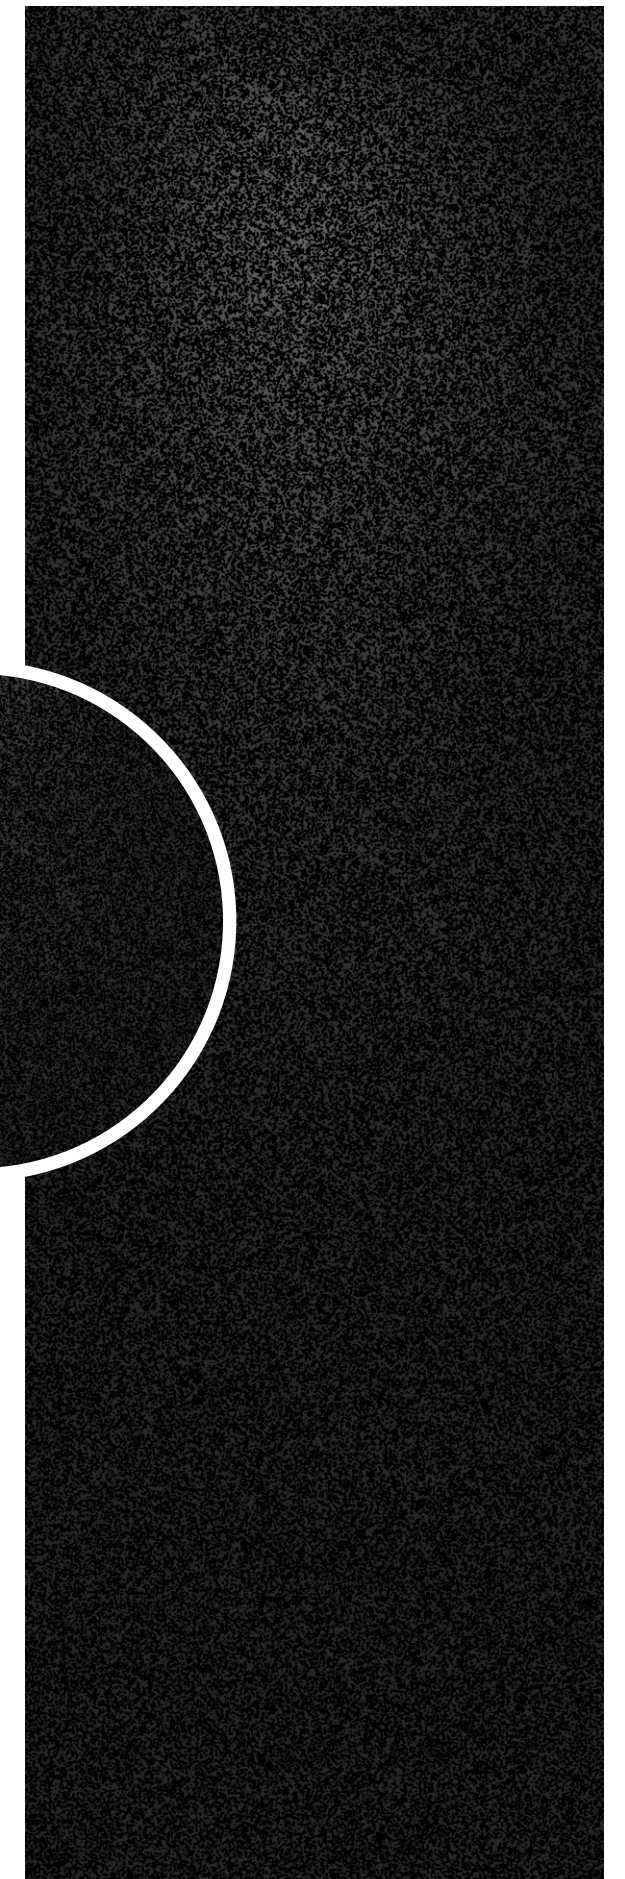

Polished
800x2400mm

BACK TO
INDEX



italica
INNOVATING TRENDS

CRYSTAL WHITE

COLOR BODY



Technical Specification – SAGO SERIES

CHARACTERISTIC	STANDARD AS PER ISO13006:2018/ EN14411 Gr.B1a	STANDARD AS PER IS15622:2017 Gr.B1a	MEAN VALUE OF ITALICA	TEST METHOD
Regulatory Properties				
Deviation in Length and Width	± 0.30% (± 1.00mm)	± 0.10 %	± 0.10 %	ISO 10545-2 & IS 13630-1
Deviation in Thickness	± 5.00% (± 0.50mm)	± 5.00 %	± 4.00 %	ISO 10545-2 & IS 13630-1
Straightness in Side	± 0.30% (± 0.80mm)	± 0.10 %	± 0.10 %	ISO 10545-2 & IS 13630-1
Rectangularity	± 0.30% (± 1.50mm)	± 0.10 %	± 0.10 %	ISO 10545-2 & IS 13630-1
Surface Flatness Central Curvature	± 0.40% (± 1.80mm)	± 0.50 %	± 0.20 %	ISO 10545-2 & IS 13630-1
Surface Flatness Edge Curvature	± 0.40% (± 1.80mm)	± 0.50 %	± 0.20 %	ISO 10545-2 & IS 13630-1
Surface Flatness Warpage	± 0.40% (± 1.80mm)	± 0.50 %	± 0.10 %	ISO 10545-2 & IS 13630-1
Surface Quality	> 95% defacts free	> 95% defacts free	> 95% defacts free	ISO 10545-2 & IS 13630-1
Small Color Difference(for Plain Colour)	ΔE < 0.75	N.A.	ΔE < 0.30	ISO 10545-16
Glossiness(with nano polished)	as per mfg.	as per mfg.	>90**	Glossmeter 60°
Glossiness(without polished)	as per mfg.	as per mfg.	3" < GLOSS < 7"	Glossmeter 60°
Glossiness(Satin)	as per mfg.	as per mfg.	7" < GLOSS < 18"	Glossmeter 60°
Structural properties				
Water absorption	≤ 0.50%	≤ 0.080 %	≤ 0.060 %	ISO 10545-3 & IS 13630-2
Bulk density	as per mfg.	Min. 2.20 g/cc	> 2.28 gm/cc	DIN51082 & IS 13630-2
Massive Mechanical Properties				
Modulus of rupture	Min. 35.0 N/mm	Min. 35.0 N/mm	Min. 40.0 N/mm	ISO 10545-4 & IS 13630-6
Breaking Strength thickness < 7.5	Min. 700.0 N	Min. 700.0 N	Min. 1000.0 N	ISO 10545-4 & IS 13630-6
Breaking Strength thickness ≥ 7.5	Min. 1300.0 N	Min. 1300.0 N	Min. 1800.0 N	ISO 10545-4 & IS 13630-6
Breaking Strength thickness ≥ 7.5 (75mm)	Min. 1300.0 N	Min. 1300.0 N	Min. 5000.0 N	ISO 10545-4 & IS 13630-6
Surface Mechanical Properties				
MOH'S hardness #	as per mfg.	Min.5	Gloss -Min 4 / Matt-Min.6	BS EN 15771: 2010
Deep abrasion resistance	Max. 175mm	Max. 140mm ²	Max. 132mm ²	ISO 10545-6 & IS 13630-12
Thermal Hydrometric Properties				
Moisture expansion	Max. 0.06%(0.6mm/m)	Max. 0.02mm/m	Max. 0.02mm/m	ISO 10545 - 10 & IS 13630-3
Thermal expansion(COE) at 100°C	as per mfg.	Max. 6.0 X 10 ⁶	Max. 6.0 X 10 ⁶	ISO 10545 - 8 & IS 13630-4
Thermal shock resistance	Min. 10 Cycle	Min. 10 Cycle	Min. 10 Cycle	ISO 10545 - 9 & IS 13630-5
Impact resistance(COR)	Min. 0.55	Min. 0.55	Min. 0.55	ISO 10545 - 5 & IS 13630-14
Frost Resistance	as per mfg.	as per mfg.	Frost Proof	ISO 10545 - 12 & IS 13630-10
Chemical Properties				
Resistance to Staining glazed	Min. Class 3	Min. Class 2	Min. Class 4 / Min Class 2	ISO 10545 - 14 & IS 13630-8
Resistance to household chemicals & swimming pool salts glazed	Min. Class UB	as per mfg.	Min. Class UB/ Min. Class A	ISO 10545 - 13 & IS 13630-8
Resistance to low concentrate acid and alkalis glazed	as per mfg.	as per mfg.	Min. Class ULB*/ Min Class A***	ISO 10545 - 13 & IS 13630-8
Resistance to high concentrate acid and alkalis glazed	as per mfg.	as per mfg.	Min. Class UHB/ Min. Class A***	ISO 10545 - 13 & IS 13630-8
Safety Properties				
Skid resistance(DCOF-DRY) ##	as per mfg.	as per mfg.	Polished- <0.30/ Matt-> 0.40	ANSI/NFSIB1013-2012
Slip resistance (DCOF) (R VALUE) ##	as per mfg.	as per mfg.	R9 TO R13	DIN 51130
Fire resistance	as per mfg.	N.A.	Fire Proof	N.A.

* Glossiness 90% with nano technology
 ***Except Hydrofluoric Acid & it's compound
 # Unglazed tiles intended for use on floor
 #As per customer requirement

Size	Thickness	No of Slab/Box	Weight/Box	Coverage Area
80x240 cm	15mm	1pcs.	67kg (Approx)	20.67 sq. ft (Approx)

Technical Specification - FULL BODY

CHARACTERISTIC	STANDARD AS PER ISO13006:2018/ EN14411 Gr.Bla	MEAN VALUE OF ITALICA	TEST METHOD
Regulatory Properties			
Deviation in Length and Width	± 0.30% (± 1.00mm)	± 0.10 %	ISO 10545-2
Deviation in Thickness	± 5.00% (± 0.50mm)	± 5.00 %	ISO 10545-2
Straightness in Side	± 0.30% (± 0.80mm)	± 0.10 %	ISO 10545-2
Rectangularity	± 0.30% (± 1.50mm)	± 0.10 %	ISO 10545-2
Surface Flatness Central Curvature	± 0.40% (± 1.80mm)	± 0.50 %	ISO 10545-2
Surface Flatness Edge Curvature	± 0.40% (± 1.80mm)	± 0.50 %	ISO 10545-2
Surface Flatness Warpage	± 0.40% (± 1.80mm)	± 0.50 %	ISO 10545-2
Surface Quality	> 95% defacts free	> 95% defacts free	ISO 10545-2
Small Color Difference(for Plain Colour)	ΔE < 1.00	ΔE < 0.30	ISO 10545-16
Glossiness(Polished)	as per mfg.	Gloss Value > 90	Glossmeter 60°
Glossiness(Matt)	as per mfg.	3 < Gloss Value < 7	Glossmeter 60°
Glossiness(Posh/Satin)	as per mfg.	7 < Gloss Value < 18	Glossmeter 60°
Physical Properties			
Water absorption	≤ 0.50%	≤ 0.060 %	ISO 10545-3
Bulk density	as pr mfg.	Min. 2.28 g/cc	ISO 10545-3
Mechanical Properties			
Modulus of rupture	Min. 35.0 N/mm ²	Min. 42.0 N/mm ²	ISO 10545-4
Breaking Strength thickness < 7.5	Min. 700.0 N	Min. 1000.0 N	ISO 10545-4
Breaking Strength thickness ≥ 7.5	Min. 1300.0 N	Min. 1800.0 N	ISO 10545-4
Breaking Strength thickness ≥ 7.5 mm	Min. 1300.0 N	Min. 7500.0 N	ISO 10545-4
Surface Properties			
MOH'S hardness #	as per mfg.	Glossy Min. 4* / Posh Min.6	BS EN 15771
Surface abrasion resistance #	as per mfg.	Glossy Min. 2 / Posh Min.3	ISO 10545-7
Deep abrasion resistance #	Max. 175 mm ³	Max. 132 mm ³	ISO 10545-6
Thermal Properties			
Moisture expansion	Max. 0.06%(0.6mm/m)	Max. 0.02mm/m	ISO 10545 - 10
Thermal expansion(COE) at 100°C	as per mfg.	Max. 6.0 X 10 ⁻⁶	ISO 10545 - 8
Thermal shock resistance	Min. 10 Cycle	Min. '0 Cycle	ISO 10545 - 9
Impact resistance(COR) #	Min. 0.55	Min. 0.55	ISO 10545 - 5
Frost Resistance	as per mfg.	Frost Proof	ISO 10545 - 12
Chemical Resistance			
Resistance to Staining glazed	Min. Class 3	Min. Class 4	ISO 10545 - 14
Resistance to household chemicals & swimming pool salts glazed	Min. Class GB	Min. Class GA	ISO 10545 - 13
Resistance to low concentrate acid and alkalis glazed	as per mfg.	Min. Class GLB**	ISO 10545 - 13
Resistance to high concentrate acid and alkalis glazed	as per mfg.	Min. Class GHB**	ISO 10545 - 13
Other Properties			
Skid resistance(DCOF-DRY) ###	as per mfg.	Glossy PO(< ¹³) / Posh ≥P ^{1(2-2 4)}	BS 7976-2
Slip resistance(DCOF) (R VALUE) ##	as per mfg.	R9 TO R13	DIN 51130
Fire resistance	as per mfg.	Fire Proof	N.A.

* Glossiness 90% with nano technology
 ***Except Hydrofluoric Acid & it's compound
 # Unglazed tiles intended for use on floor
 #As per customer requirement

Size	Thickness	No of Slab/Box	Weight/Box	Coverage Area
80x240 cm	15mm	1pcs.	67kg (Approx)	20.67 sq. ft (Approx)

Technical Specification - COLOR BODY

CHARACTERISTIC	STANDARD AS PER ISO13006:2018/ ENI4411 Gr.Bla	STANDARD AS PER ISI5622:2017 Gr.Bla	MEAN VALUE OF ITALICA	TEST METHOD
Regulatory Properties				
Deviation in Length and Width	± 0.30% (± 1.00mm)	± 0.10 %	± 0.10 %	ISO 10545-2 & IS 13630-1
Deviation in Thickness	± 5.00% (± 0.50mm)	± 5.00 %	± 4.00 %	ISO 10545-2 & IS 13630-1
Straightness in Side	± 0.30% (± 0.80mm)	± 0.10 %	± 0.10 %	ISO 10545-2 & IS 13630-1
Rectangularity	± 0.30% (± 1.50mm)	± 0.10 %	± 0.10 %	ISO 10545-2 & IS 13630-1
Surface Flatness Central Curvature	± 0.40% (± 1.80mm)	± 0.50 %	± 0.20 %	ISO 10545-2 & IS 13630-1
Surface Flatness Edge Curvature	± 0.40% (± 1.80mm)	± 0.50 %	± 0.20 %	ISO 10545-2 & IS 13630-1
Surface Flatness Warpage	± 0.40% (± 1.80mm)	± 0.50 %	± 0.10 %	ISO 10545-2 & IS 13630-1
Surface Quality	> 95% defacts free	> 95% defacts free	> 95% defacts free	ISO 10545-2 & IS 13630-1
Small Color Difference(for Plain Colour)	ΔE < 0.75	N.A.	ΔE < 0.30	ISO 10545-16
Glossiness(Polished)	as per mfg.	as per mfg.	>90**	Glossmeter 60°
Glossiness(Satin)	as per mfg.	as per mfg.	7<62955	Glossmeter 60°
Structural properties				
Water absorption	≤ 0.50%	≤ 0.080 %	≤ 0.080 %	ISO 10545-3 & IS 13630-2
Bulk density	as per mfg.	Min. 2.20 g/cc	> 2.28 gm/cc	DIN51082 & IS 13630-2
Massive Mechanical Properties				
Modulus of rupture	Min. 35.0 N/mm ²	Min. 35.0 N/mm ²	Min. 40.0 N/mm ²	ISO 10545-4 & IS 13630-6
Breaking Strength thickness ≥ 7.5 mm	Min. 1300.0 N	Min. 1300.0 N	Min. 6000.0 N	ISO 10545-4 & IS 13630-6
Surface Mechanical Properties				
MOH'S hardness #	as per mfg.	Min.5	Polished-Min 4**/ Matt-Min.6	BS EN 15771/ IS 13630-13
Surface abrasion resistance #	as per mfg.	Min Class II	Polished-Min 1**/ Matt-Min. II	ISO 10545-7 & IS 13630-11
Thermal Hydrometric Properties				
Moisture expansion	Max. 0.06%(0.6mm/m)	Max. 0.02mm/m	Max. 0.02mm/m	ISO 10545 - 10 & IS 13630-3
Thermal expansion(COE) at 100°C	as per mfg.	Max. 6.0 X 10 ⁶	Max. 6.0 X 10 ⁶	ISO 10545 - 8 & IS 13630-4
Thermal shock resistance	Min. 10 Cycle	Min. 10 Cycle	Min. 10 Cycle	ISO 10545 - 9 & IS 13630-5
Impact resistance(COR) #	Min. 0.55	Min. 0.55	Min. 0.55	ISO 10545 - 5 & IS 13630-14
Frost Resistance	as per mfg.	as per mfg.	Frost Proof	ISO 10545 - 12 & IS 13630-10
Crazing Resistance at 7.5bar	4 Cycle	4 Cycle	4 Cycle	ISO 10545 - 11 & IS 13630-9
Chemical Properties				
Resistance to Staining glazed	Min. Class 3	Min. Class I	Min. Class / Min Class I	ISO 10545 - 14 & IS 13630-8
Resistance to household chemicals & swimming pool salts glazed	Min. Class UB	Min. Class AA	Min. Class Gb/ Min. Class AA	ISO 10545 - 13 & IS 13630-8
Resistance to low concentrate acid and alkalis glazed	as per mfg.	as per mfg.	Min. Class GLB/ Min Class A***	ISO 10545 - 13 & IS 13630-8
Resistance to high concentrate acid and alkalis glazed	as per mfg.	as per mfg.	Min. Class GHB/ Min. Class A***	ISO 10545 - 13 & IS 13630-8
Safety Properties				
Skid resistance(DCOF-WET PENDULLUM) ##	as per mfg.	as per mfg.	Glossy PO,Matt PI	ANSI/NFSIB1013-2012
Slip resistance Polished/Matt (DCOF) (R VALUE) ##	as per mfg.	as per mfg.	R9 TO R10	DIN 51130
Fire resistance	as per mfg.	N.A.	Does not yield Pb & Cd	N.A.

* Whichever is Lower

** With nanotechnology (Polished Vitrified Tiles) Depending on Application area (low or high intensity of traffic)

***Except Hydrofluoric Acid & it's compound

Tiles intended for use on floor

#For Poor tiles , as per customer requirement

Size	Thickness	No of Slab/Box	Weight/Box	Coverage Area
80x240 cm	15mm	1pcs.	67kg (Approx)	20.67 sq. ft (Approx)

Designed in
ITALY 



Designed in
ITALY 



CORPORATE OFFICE & PLANT
Italica Granito Pvt Ltd.
Matel Road, 8-A, National Highway.
Morbi - 363 621, Gujarat (INDIA).

M: +91 70690 11151
E: info@italicatiles.com
www.italicatiles.com

