

MOTTO®
Tiles & Bathware

THE OUTDOOR ARMOR



BASALTO
SERIES

600x600mm
[Outdoor Collection]

BASALTO /
CATALOGUE '25


Step
outside in
strength
and
style

About Company

Motto is one of the most dynamic & productive brands of the modern ceramic world that is brought to life by a visionary person Mr. Mahendra Patel. Over the years the company has developed manifold.

Since 2004 - the inception year, to today we have expanded our reach to national & international arenas with a capillary presence in more than 70+ countries with 2500 satisfied customers.

Finest skills clubbed with state of the art technology have helped us to carve a niche, which is stamped by authorities as we are ISO 9001 : 2018 Certified. Overall the company has marked its position as the leading Manufacturer, Exporter and Supplier of the exquisite Ceramic Porcelain Tiles for Wall & Floor.

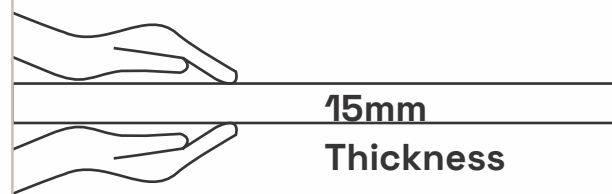

Why should indoors have all the fun?

The Basalto Series is a bold reinterpretation of nature's raw power, capturing the essence of volcanic rock to bring attitude and strength to your outdoors. It is a series that stands strong, as firm as a rock, and blends nature's cool with urban edge. The series is available in 600x600mm with a resilient thickness of 15mm, and in earthy tones that are truly impressive. The silent, stone-like pattern on these tiles reflects art and embraces the concept of modern minimalism.

Basalto effortlessly commands attention, leaving you with a refined aesthetic that impresses both you and your guests. Bring grounded elegance to your exteriors, as they deserve to be showcased too.



Feature-rich, Fuss-free

It's time for your outdoor makeover with Basalto tiles that make your exteriors both strong and stunning. Built to handle it all, these tiles feature an R10 surface and perform exceptionally well in wet areas, ensuring reliable slip resistance. With durability that can withstand everything from toddlers to red wine, this series is crafted for unforgettable first impressions and everyday living.


These tiles are weather-resistant and show their true strength in all conditions. Whether you're paving a patio, jazzing up a balcony, or revamping your walkways, Basalto turns your outdoors into a design statement. So go ahead, host that garden party. You and your outdoors deserve nothing but the finest.



**ANTI - SLIP
SURFACE**




**UV
RESISTANT**




**STAIN
RESISTANT**



**HIGH
STRENGTH**



**NATURAL AND
RECYCLABLE**



**IMPACT
RESISTANT**



**LOW
MAINTENANCE**



**CHEMICAL
RESISTANT**

Made for anywhere and everywhere



- **Hotel & Spa Area**
- **Restaurants & Café Area**
- **Outdoor & Balcony Area**
- **Terrace & Reading Area**
- **Swimming Pool Area**
- **Living Area**



BASALTO SERIES

From warm earthy browns to sleek charcoal greys, Basalto's color palette is designed to impress at first glance and endure through every season. Each shade is carefully chosen to match a mood and tell your story while elevating your space. So, set a cozy and inviting tone with colors that speak your style and stand the test of time.

[Click To View The Tile Design](#)




BASALTO CREMA




BASALTO PUMIC




BASALTO DOLOMINE

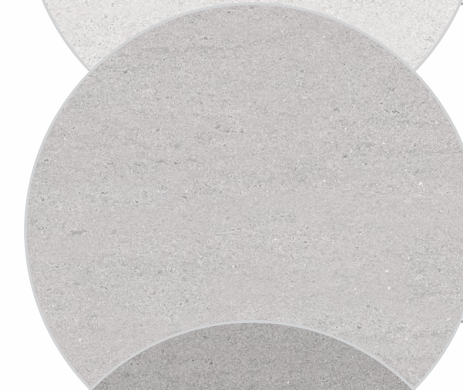


BASALTO BIANCO

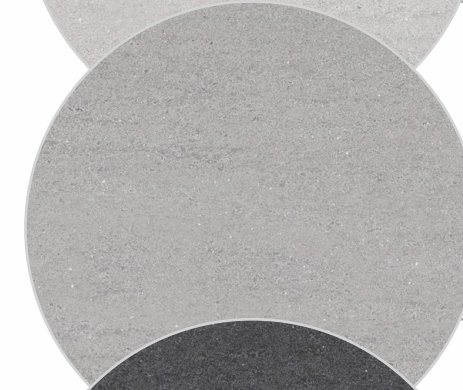

BASALTO MIST

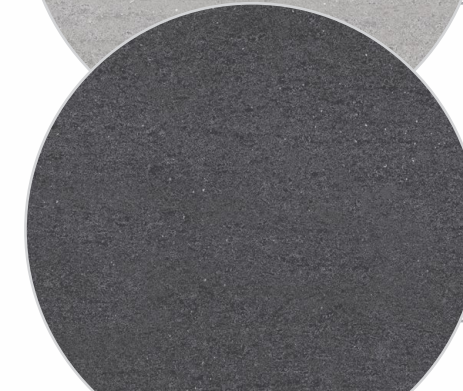

BASALTO GRAPHITE

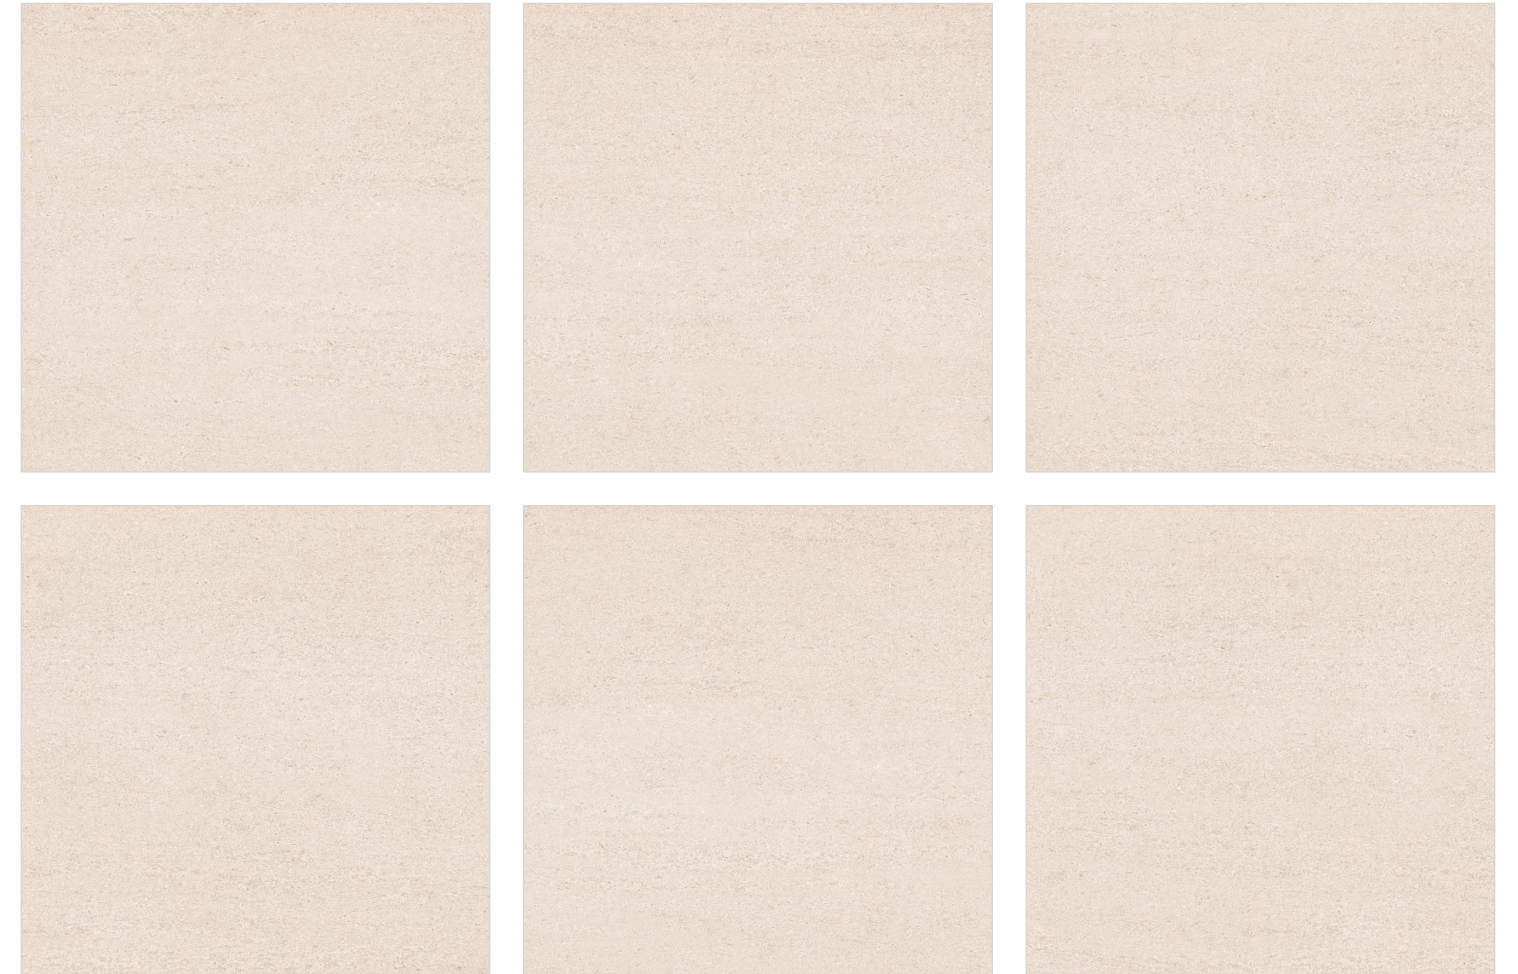

**BASALTO
CREMA**

Random-6

SIZE	600x600mm
THICKNESS	15mm
TYPE	Ultra Fullbody
SURFACE	R-10


[Back to Index](#)



**BASALTO
CREMA**

BASALTO /
CATALOGUE '25



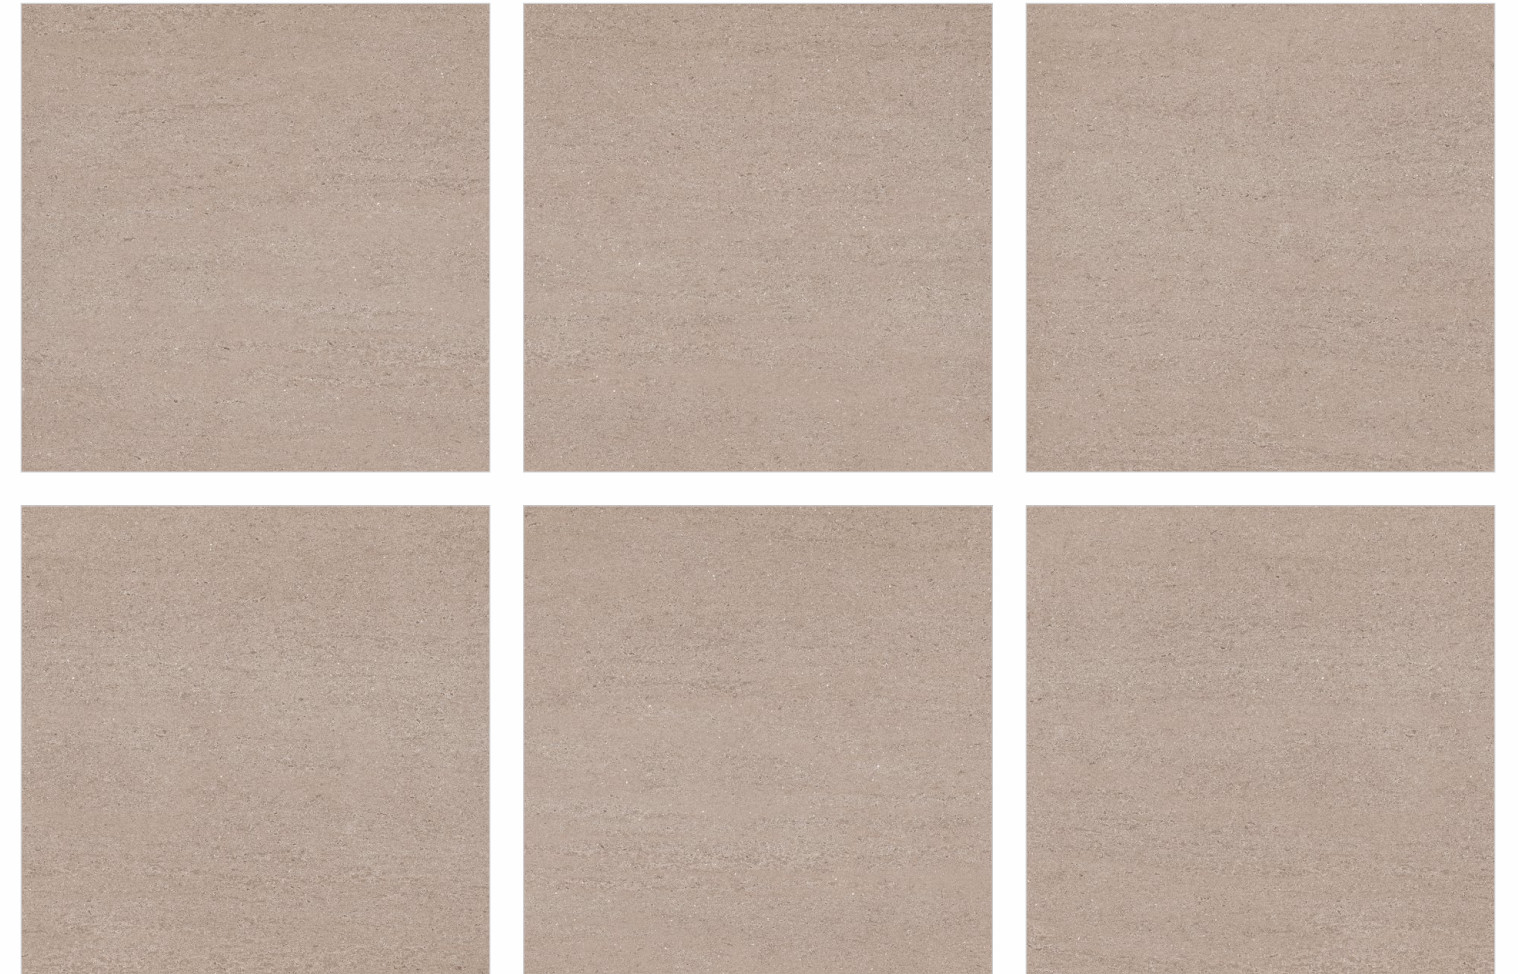

BASALTO
PUMIC

Random-6

SIZE	600x600mm
THICKNESS	15mm
TYPE	Ultra Fullbody
SURFACE	R-10

[Back to Index](#)







BASALTO
DOLOMINE

Random-6

SIZE	600x600mm
THICKNESS	15mm
TYPE	Ultra Fullbody
SURFACE	R-10

[Back to Index](#)








BASALTO
BIANCO


Random-6

SIZE	600x600mm
THICKNESS	15mm
TYPE	Ultra Fullbody
SURFACE	R-10

[Back to Index](#)

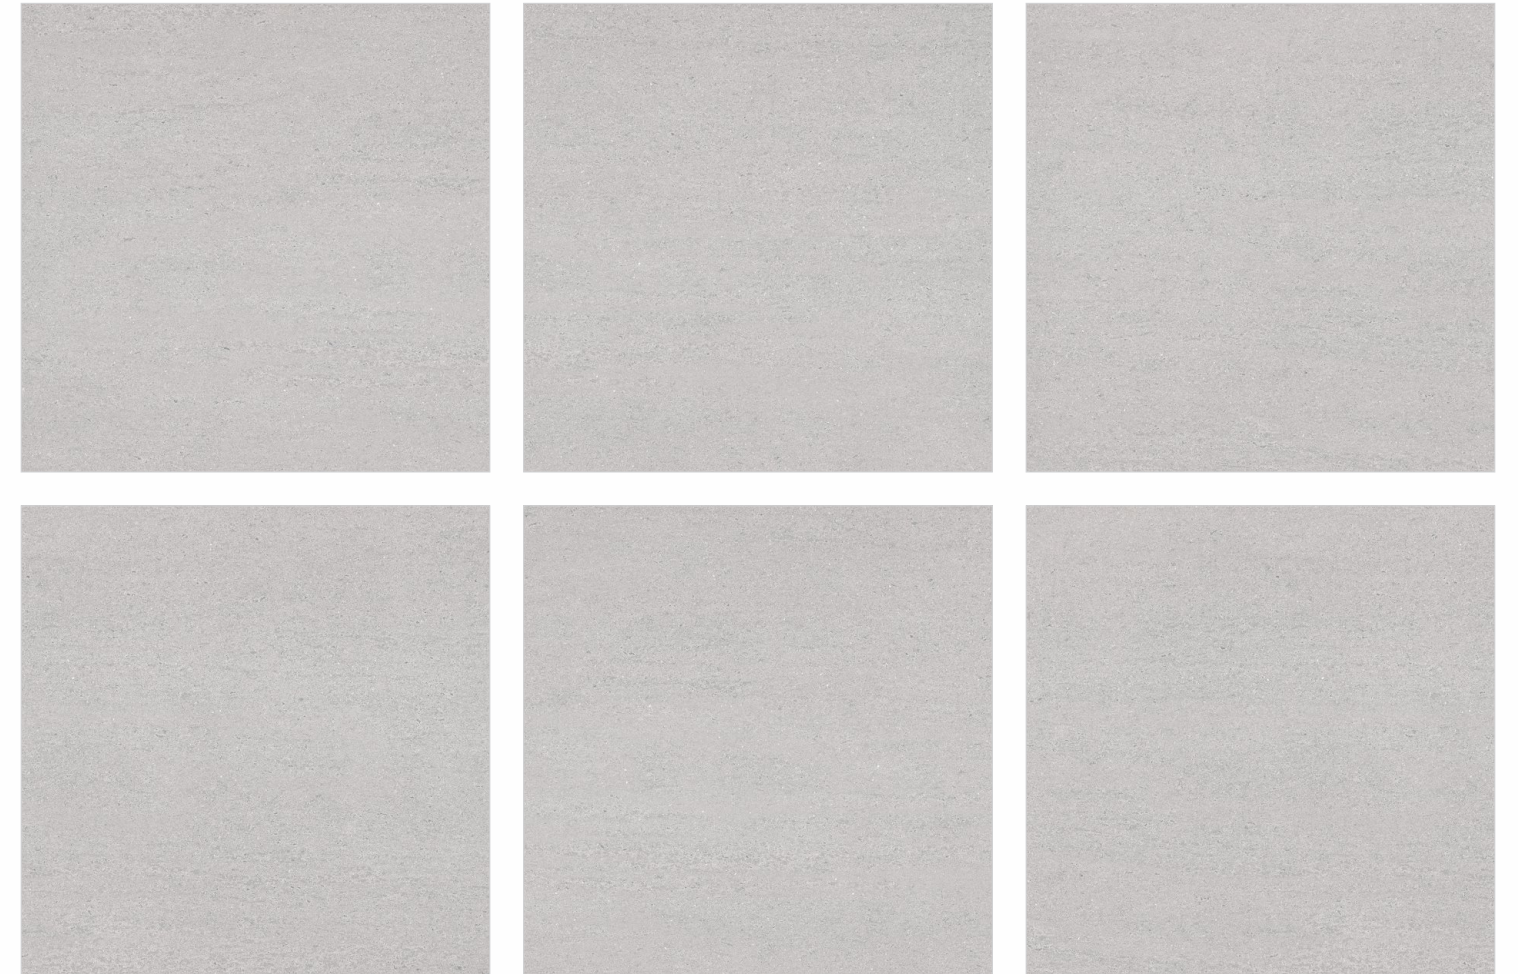



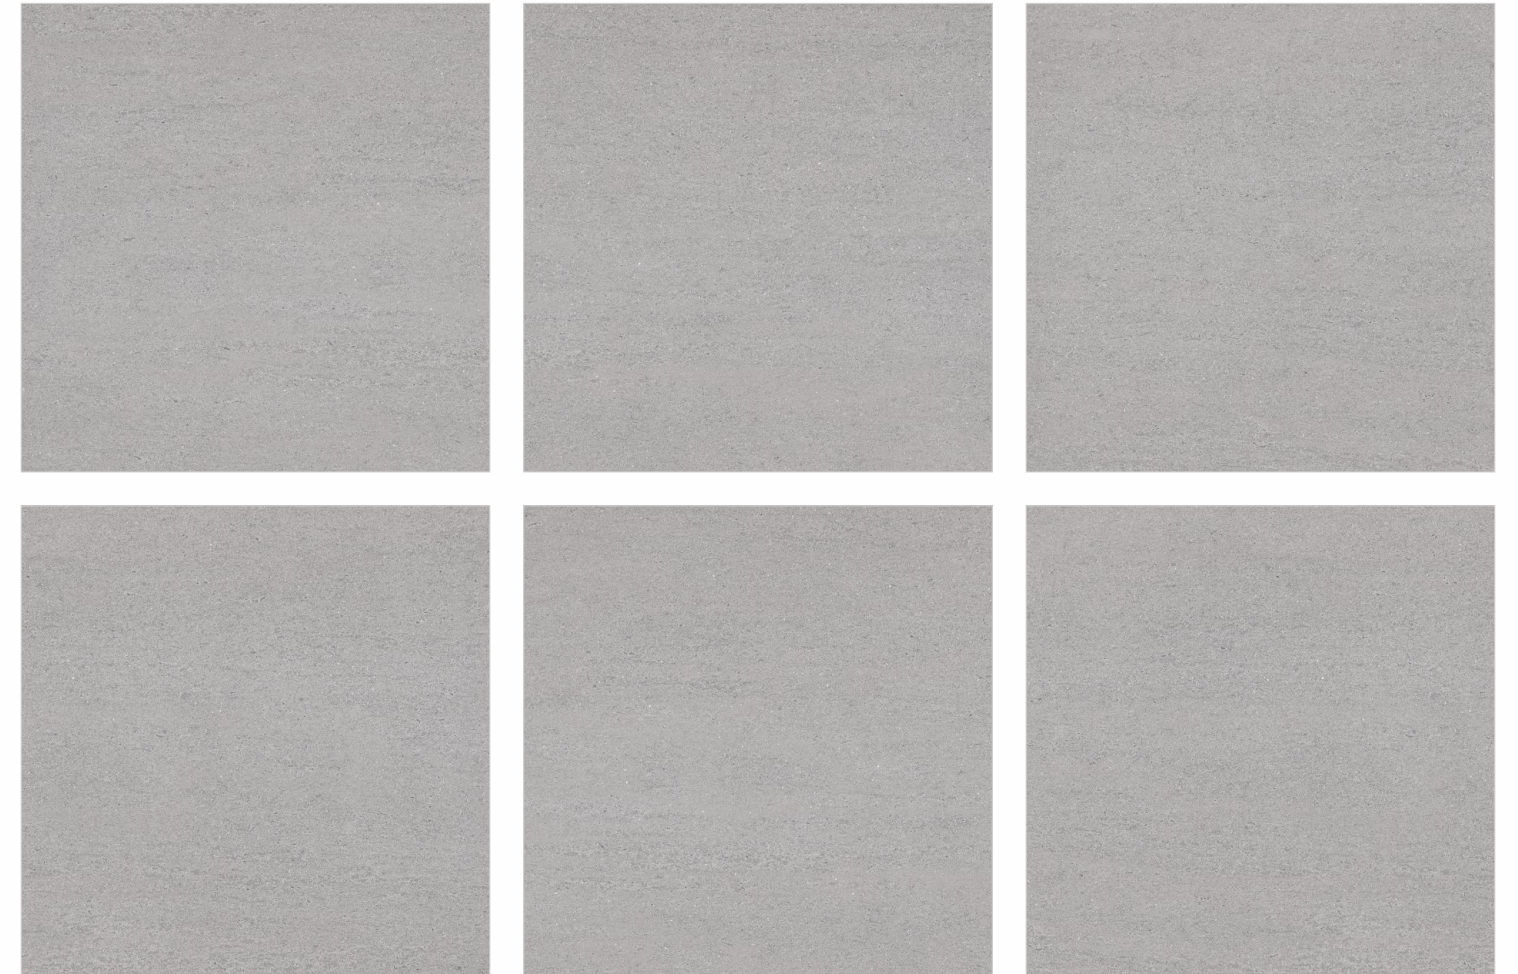

BASALTO
MIST

Random-6

SIZE	600x600mm
THICKNESS	15mm
TYPE	Ultra Fullbody
SURFACE	R-10

[Back to Index](#)









**BASALTO
GRAPHITE**

Random-6

SIZE	600x600mm
THICKNESS	15mm
TYPE	Ultra Fullbody
SURFACE	R-10

[Back to Index](#)

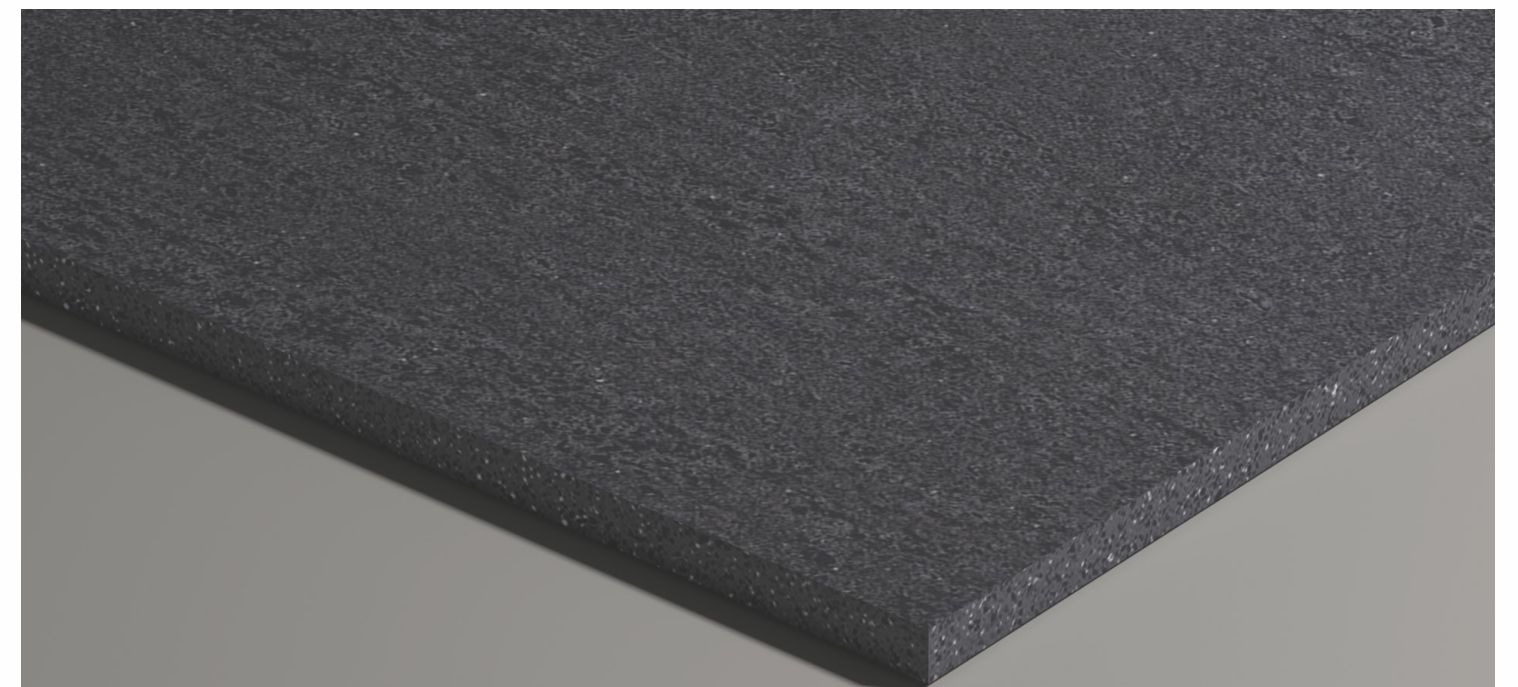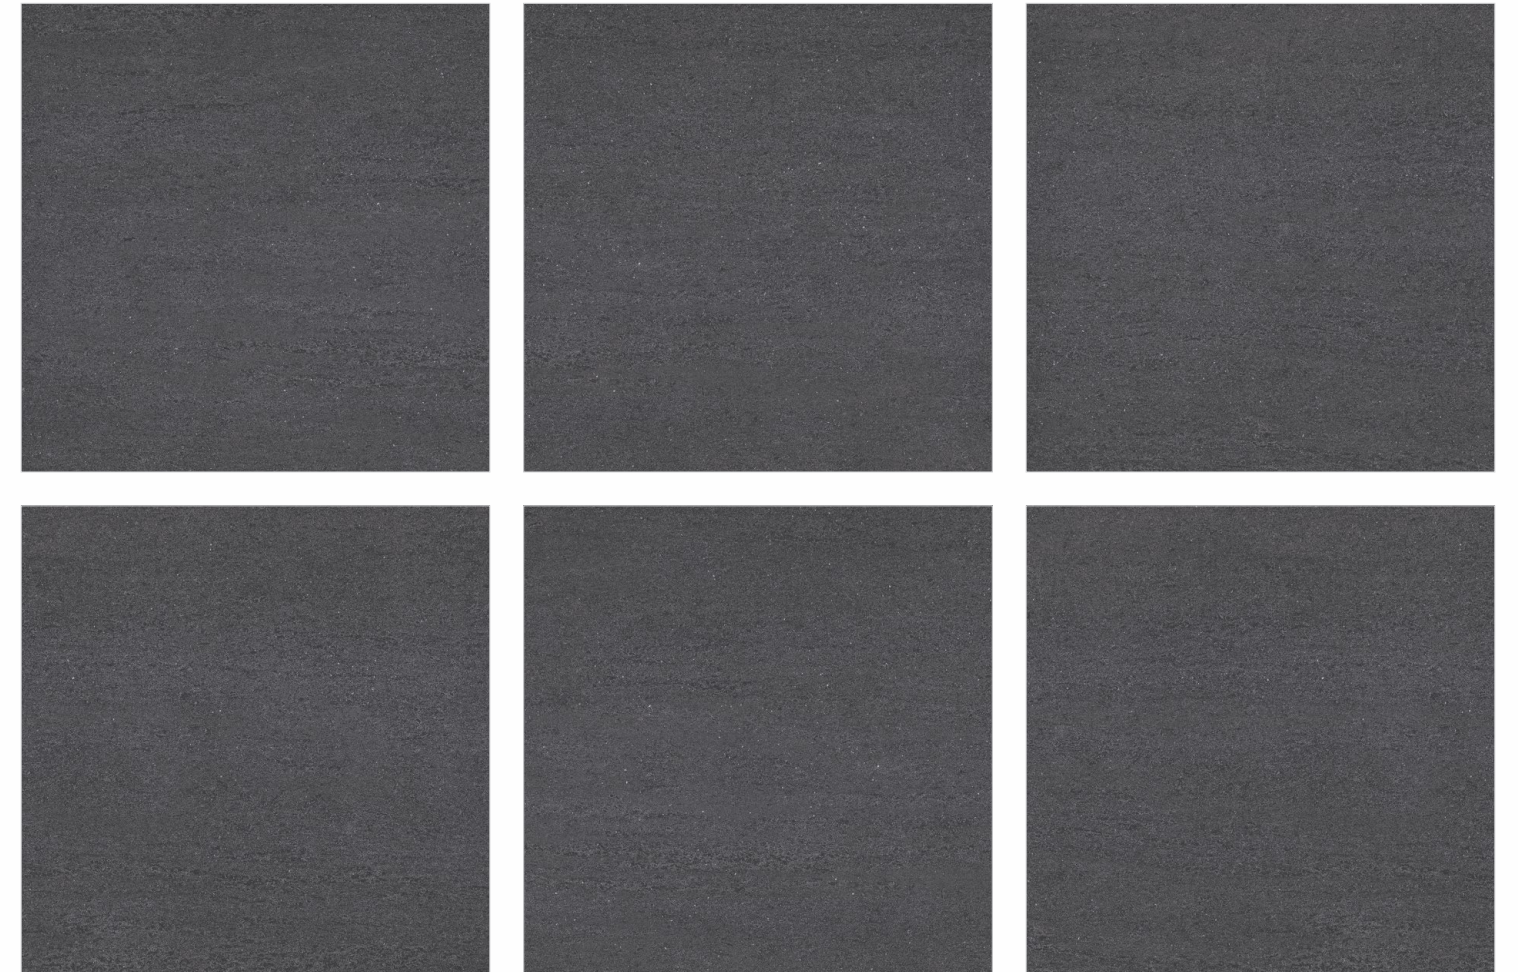


**BASALTO
GRAPHITE**

BASALTO /
CATALOGUE '25




INSTRUCTIONS FOR MANUAL INSTALLATION


SINGLE LAYER METHOD



DOUBLE-LAYER METHOD




COMPRESSING THE SLAB



IMPORTANT

All cutout corners must have a minimum radius of 1/4". Avoid 90° angles. We recommend using a radius greater than 1/4" whenever the kitchen design allows, as it enhances the strength and durability of the countertop.



✓ CORRECT



✗ INCORRECT



✗ INCORRECT



✗ INCORRECT

CLEANING & MAINTENANCE

Our products are non-porous due to high-quality raw materials, stringent production parameters, and state-of-the-art technology. As a result, dust and waste cannot penetrate the surface.

In most cases, a damp cloth is sufficient for cleaning.

Regular cleaning enhances the aesthetic features of the surface and maintains its exceptional shine.

For more aggressive cleaning required by certain common foods and substances, please refer to the table below.

TYPES OF STAINS	CHEMICAL PRODUCTS	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Baking Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Agents, Hydrochloric Acid
Cement	Acid	Hydrochloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydrochloric Acid
Candle Wax	Solvent	Alcohol, Thinner
Iodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach

Note: It is recommended that any stain be cleaned immediately for best results.

TECHNICAL SPECIFICATIONS

CHARACTERISTICS	STANDARD AS PER ISO-13006/2018 En14411 gr.bla	MOTTO VALUE	TEST METHOD
Regulatory Properties			
Deviation in Length & Width	± 0.60%	± 0.10%	ISO 10545-2
Deviation in Thickness	± 5.00%	± 2.00%	ISO 10545-2
Straightness of Sides	± 0.50%	± 0.10%	ISO 10545-2
Rectangularity	± 0.60%	± 0.10%	ISO 10545-2
Surface Flatness	± 0.50%	± 0.10%	ISO 10545-2
Glossiness	As per Mfg.	Min. 90%	Gloss Meter
Regulatory Properties			
Water Absorption	≤ 0.50 %	E ≤ 0.03 %	ISO 10545-3
Massive Mechanical Properties			
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO 10545-4
Surface Mechanical Properties			
Surface Abrasion Resistance	Max. 175mm	Max. 145mm ²	ISO 10545-6
Mohs Hardness	Min. 6	≥6*	EN 101
Massive Mechanical Properties			
Frost Resistance	Frost Proof	Frost Proof	ISO 10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO 10545-9
Moisture Expansion	Nil	Nil	ISO 10545-10
Thermal Expansion	Max. 9.0 x 10 ⁻⁶	Max. 6.0x10 ⁻⁶	ISO 10545-8
Chemical Properties			
Resistance to House Hold Chemicals	No Damage	No Damage	ISO 10545-13
Stain Resistance	Resistant	Resistant	ISO 10545-14
Safety Properties			
Slip Resistance (Friction Co-efficient)	> 0.40	> 0.40	ISO 10545-17

PACKING DETAILS

Sizes (mm)	No. of Pcs/Box	Coverage Area / Box
600x600mm	2 Pcs.	7.75 Sq. ft



MOTTO GROUP

8-A, National Highway, Sartanpar Road, At. Sartanpar,
Ta. Wankaner, Morbi - 363 621, Gujarat, INDIA

Mail. info@mottogroup.in, **Web.** www.mottogroup.in

Toll-free. 1800 123 2124

Call. +91 95123 80072