



Catalogue
Adhesive Division

South & West

Kajaria



INDEX

SEGMENT	PRODUCT	PAGE No.
ADHESIVES	PREMIUM TILE ADHESIVES - CX-1	10
ADHESIVES	PREMIUM TILE ADHESIVES - VX-1	12
ADHESIVES	PREMIUM TILE ADHESIVES - CX-2	14
ADHESIVES	PREMIUM TILE ADHESIVES - VX-2	16
ADHESIVES	PREMIUM TILE ADHESIVES - EX-5	18
GROUTS	PREMIUM EPOXY GROUT - KE-100	22
GROUTS	PREMIUM UNSANDED GROUT	24
GROUT ADMIX	PREMIUM GROUT ADMIX - KGA-01	26
TILE CLEANER	TILE CLEANER- TC1	28

Kajaria

PRESENT INNOVATIVE TILE SOLUTIONS WITH THE BEST PERFORMANCE

The largest manufacturer of ceramic and vitrified tiles in India. Equipped with cutting-edge technology, we at Kajaria strive to deliver quality products and services to our customers. Our team of experts work around the clock to ensure that the quality of our product is never compromised.

When tiles are fixed to any surface, most vulnerable point is always the bond between the tile and substrate. We eliminate this weakness by significantly improving the bonding strength of the adhesive to both the tile and substrate.

Kajaria offers you wide range of tile adhesives & grouts for fixing of various categories of tile for faster laying & long lasting applications.

Our Adhesive Division Basket is consist of :

- ▶ **PREMIUM ADHESIVES**
- ▶ **PREMIUM EPOXY GROUT**
- ▶ **PREMIUM UNSANDED GROUT**
- ▶ **PREMIUM GROUT ADMIX**
- ▶ **PREMIUM TILE CLEANER**

Kajaria

PREMIUM ADHESIVES, GROUTS & TILE CLEANER INGREDIENTS FOR PERFECT RESULTS

CX-1

PREMIUM TILE ADHESIVE FOR CERAMIC FLOOR TILES

CX1 is grey cement based polymer modified quick set tile adhesive meant for Ceramic floor tiles. It gives excellent bond on cementitious surfaces like concrete and plaster. CX1 Adhesive forms a barrier between two surfaces and has an excellent 'grab' properties.



VX-1

HIGH PERFORMANCE PREMIUM TILE ADHESIVE FOR ALL KIND OF FLOOR TILES

VX1 is polymer modified grey cement based tile adhesive specially designed for fixing all kinds of tiles including vitrified tiles, ceramic tiles and large format tiles on internal or external floor & Wall surface. Also suitable for bathroom wall tiles.



CX-2 WHITE

WHITE COLOR PREMIUM TILE ADHESIVE FOR CERAMIC FLOOR TILES

CX2 is polymer modified white cement based tile adhesive meant for fixing ceramic floor tiles. White colour of CX2 white protects light base tiles from discoloration along with strong bonding with the surface. Highly recommended for light base ceramic floor tiles



VX-2 WHITE

HIGH PERFORMANCE WHITE COLOR PREMIUM TILE ADHESIVE FOR ALL KIND OF FLOOR TILES AND MARBLES

VX2 is polymer modified white cement based tile adhesive protects light base tiles and marbles from discoloration along with strong bonding. suitable for all kinds of floor & Wall tiles which includes vitrified tiles, ceramic tiles, large format tiles & marble flooring.



Kajaria

PREMIUM ADHESIVES, GROUTS & TILE CLEANER INGREDIENTS FOR PERFECT RESULTS

EX-5

HEAVY DUTY PREMIUM TILE ADHESIVE FOR INTERIOR & EXTERIOR WALL & FLOOR TILES

EX-5 is a high strength adhesive. EX-5 is specially designed for heavy duty tile application. It has superior strength & ideal for all kind of tiles & Stones. It is also suitable for interior & exterior wall cladding tiles.

Not recommended for height above 30 ft. and tile size bigger than 45x90 cm



KE-100 PREMIUM EPOXY GROUT

100 % SOLID EPOXY GROUT

Kajaria KE-100 is a Stain free Epoxy grout for floors & Walls. It is a color fast, water & chemical resistant & 100 % solid epoxy grout suitable for Ceramic tiles, Vitrified tiles, marbles and stones, especially in stain prone areas such as kitchens and washrooms (residential & commercial installations). Available in 20 colours. Suitable for joints between 2-12 mm. Available in 1Kg & 5Kg Pack.



PREMIUM UNSANDED GROUT

SUPERIOR QUALITY GROUT FOR CLEAN JOINTS

Kajaria Unsanded Grout is a superior quality grout. It consist of a carefully prepared blend of white cement, chemical additives and fillers. It is easy to install just mix with water/Grout Admix and use. For best results, use with Kajaria Premium Grout Admix KGA-01. It is ideal for both floors and walls applications. Available in 20 colours. Suitable for joints between 1-3 mm.



TC1 TILE CLEANER

ANTI GERMS & ANTI STAIN

Kajaria Tile Cleaner TC1 is a fast acting acid based cleaner for regular cleaning of dirt and stains on tile surface, designed for daily maintenance of tiles.





The tile adhesive is applied in a thin layer by means of a notched trowel.



The tiles are placed with spacers and adjusted accordingly.



To complete the installation, joints are filled with premium Epoxy grout.

PERFECT SOLUTION FOR TILE FIXING

Cement-based tile adhesives adhere very well to porous substrates such as bricks, plasters, earthenware tiles and stoneware tiles. These structures are good anchors for the calcium silicate hydrate needles that form when cement hardens. In contrast, modern porcelain stoneware tiles have extremely smooth surfaces. Tile adhesives for the tiles must be highly modified to attain the necessary tensile adhesion strength coupled with high flexibility.

Tiles require high-quality grouts. Good adhesion at the tile edges, good abrasion resistance and limited water uptake coupled with good water-vapour permeability. High quality grouts play important role in the laying of the tiles: like flexible tile adhesives, they compensate for any stresses that may arise.

EASY LAYING OF TRENDING LARGE TILES/ STONES

The trend toward large-format tiles is continuing. These tiles create a spacious and luxurious environment. At the same time, they are easier to clean. However, technical challenges also increase as the tiles get larger.

Successful laying of large tiles depends on a variety of factors- improving the adhesion and increasing the flexibility of the adhesives with polymer powders plays a key role.



KAJARIA PREMIUM TILE ADHESIVES



Fast and Economical

Kajaria Premium Tile adhesive can be easily applied over large areas with a notched trowel. Then the tiles can be adjusted gently after laying to produce a uniform adhesive bed.

Easy to work with

Kajaria's High-quality tile adhesives for wall application have good non-s slump properties. The freshly laid tiles therefore do not slip on the wall. It is thus possible to lay the tiles from top to bottom without using spacers. This makes it easier to produce a uniform pattern.

Excellent Results

Kajaria's advanced premium adhesives are so easy to mix and install that good results are consistently achieved. Irrespective of the tile material or the substrate, the tile adhesive can be custom-mixed for the particular tile type and substrate.



Perfect Finish



Resistant to
Stains and Seepage




Water
Resistant



Saves Time
Surface ready to use
within 24 hours



High Bond
Strength



No Hollowness between
Tile and Substrate



Can be used directly
on any surface*



White Adhesive specially
for light base tile

*not suitable for surfaces subject to vibration like plywood, metal, glass, gypsum boards, fibre cement slabs & smooth pre-fabricated concrete.

CX-1

PREMIUM TILE ADHESIVE FOR CERAMIC FLOOR TILES

Product Description:

CX1 is grey cement based polymer modified quick set tile adhesive. It gives excellent bond on cementitious surfaces like concrete and plaster. CX1 Adhesive forms a waterproof barrier between two surfaces and has an excellent 'grab' properties.



Pack Size: 20Kg.

Color: Grey

Shelf Life:

1 year in dry unopened bags.

Coverage (in sq. mtr.)*

4-5 Sq. mtr. / 20 Kg bag at 3 mm thickness.

Applications:

For fixing all types of ceramic tiles on interior floor surfaces.

Advantages:

- ▶ Ready to use. Needs only mixing with water.
- ▶ Flexible, shock and Impact resistant.
- ▶ Fast and economical.
- ▶ High bond strength.
- ▶ Suitable for ceramic floor tiles.

*Coverage may vary according to evenness/level of floor


CX-1


Technical Data: (Type-1)


Density	1.79 kg/litre Approx.
Pot Life	3-4 hrs Approx.
Open Time	22 minutes Approx.
Adjustability	21 minutes Approx.
Setting Time	Approx. 1 Day
Full Strength	Approx. 28 Days
Tensile Strength	Not Less than 0.5 N / mm sq. Approx.
Shear Strength	Not less than 1 N/mm sq. Approx.




Method of Application:


- 


1 Remove all Dust, Water, Oil & Sealers from Surface/ Substrate.
- 


2 Add 5 to 6* ltrs water in-to empty bucket.
- 


3 Add 20 Kg **CX1** Adhesive in-to water and mix it till attains Uniform Paste.
- 


4 **WAIT**
5-10 MIN


Slake the Material for 5 to 10 minutes.
- 


5 Again Mix the material then take the material on notch trowel.
- 


6 Use flat side of the trowel and spread the adhesive uniformly.
- 

7 Comb the adhesive with the help of Notch trowel.
- 


8 Spread the material backside of the tile also (If tile size is More than 12"X12").
- 

9 Press the tiles firmly into position by Twisting Action.
- 

10 Press the tile gently with help of Wooden Hammer to make uniform tile surface.
- 

11 Clean the Tile surface with wet Cloth.
- 

12 **WAIT**
24 HR

For Foot Traffic wait up to 24 Hrs.
- 

13 **GROUT**

After 24 Hrs you can do the grouting.

* The POWDER: LIQUID ratio may vary according to the job conditions

VX-1

HIGH PERFORMANCE PREMIUM TILE ADHESIVE FOR ALL KIND OF WALL & FLOOR TILES

Product Description:

VX1 is polymer modified grey cement based premium tile adhesive specially designed for heavy duty applicants for fixing vitrified tiles & large size tiles on Wall & floor surfaces. This highly flexible adhesive also has an excellent waterproofing ability. When properly applied, it takes care of hollowness problem.



Pack Size: 20Kg.

Color: Grey

Shelf Life:

1 year in dry unopened bags.

Coverage (in sq. mtr.)*

4-5 Sq. mtr. / 20 Kg bag at 3 mm thickness.

Applications:

For vitrified & ceramic tiles and large format tiles on Wall & floor surfaces.

Advantages:

- ▶ Ready to use. Needs only mixing with water.
- ▶ Also suitable for Marbles and tile on tile application.
- ▶ Can also be used for internal wall tile.
- ▶ Saves time as floors are ready to be used after 24 hours.
- ▶ Excellent adhesion & low shrinkage.

*Coverage may vary according to evenness/level of Floor/Wall

VX-1

Technical Data: (Type-2)

Density	1.7 kg/litre Approx.
Pot Life	3-4 hrs Approx.
Open Time	23 minutes Approx.
Adjustability	22 minutes Approx.
Setting Time	Approx. 1 Day
Full Strength	Approx. 28 Days
Shear Strength	Not less than 1.2 N/mm Sq.
Tensile Strength	Not less than 1 N/mm Sq.



Method of Application:

- 

1 Remove all Dust, Water, Oil & Sealers from Surface/ Substrate.
- 

2 Add 5 to 6* ltrs water in-to empty bucket.
- 

3 Add 20 Kg **VX1** Adhesive in-to water and mix it till attains Uniform Paste.
- 

4 **WAIT**
5-10 MIN

Slake the Material for 5 to 10 minutes.
- 

5 Again Mix the material then take the material on notch trowel.
- 

6 Use flat side of the trowel and spread the adhesive uniformly.
- 

7 Comb the adhesive with the help of Notch trowel.
- 

8 Spread the material backside of the tile also (If tile size is More than 12"X12").
- 

9 Press the tiles firmly into position by Twisting Action.
- 

10 Press the tile gently with help of Wooden Hammer to make uniform tile surface.
- 

11 Clean the Tile surface with wet Cloth.
- 

12 **WAIT**
24 HR

For Foot Traffic wait up to 24 Hrs.
- 

13 **GROUT**

After 24 Hrs you can do the grouting.

* The POWDER: LIQUID ratio may vary according to the job conditions

CX-2 White *Add more brightness to floors*

WHITE COLOR PREMIUM TILE ADHESIVE FOR CERAMIC FLOOR TILES

Product Description:

CX2 White is white cement based polymer modified quick set tile adhesive. It gives excellent bond on cementitious surfaces like concrete and plaster. CX2 White Adhesive forms a waterproof barrier between two surfaces and has an excellent 'grab' properties. Highly recommended for light base Ceramic floor tiles.



Pack Size: 20Kg.

Color: White

Shelf Life:

1 year in dry unopened bags.

Coverage (in sq. mtr.)*

4-5 Sq. mtr. / 20 Kg bag at 3 mm thickness.

Applications:

For fixing all kind of ceramic floor tile, specially recommended for light base ceramic floor tile to give them more brightness & shine.

Advantages:

- ▶ Ready to use. Needs only mixing with water.
- ▶ Flexible, shock and Impact resistant.
- ▶ Fast and economical.
- ▶ **Highly effective for light base ceramic floor tiles.**
- ▶ Protect light base ceramic tile from discoloration.

*Coverage may vary according to evenness/level of floor

CX-2 White

Technical Data: (Type-1)

Density	1.79 kg/litre Approx.
Pot Life	3-4 hrs Approx.
Open Time	22 minutes Approx.
Adjustability	21 minutes Approx.
Setting Time	Approx. 1 Day
Full Strength	Approx. 28 Days
Tensile Strength	Not less than 1 N/mm Sq.
Shear Strength	Not less than 1.2 N/mm Sq.



Method of Application:

- Remove all Dust, Water, Oil & Sealers from Surface/ Substrate.
- Add 5 to 6* ltrs water in-to empty bucket.
- Add 20 Kg CX2 White Adhesive in-to water and mix it till attains Uniform Paste.
- WAIT**
5-10 MIN

Slake the Material for 5 to 10 minutes.
- Again Mix the material then take the material on notch trowel.
- Use flat side of the trowel and spread the adhesive uniformly.
- Comb the adhesive with the help of Notch trowel.
- Spread the material backside of the tile also (If tile size is More than 12"X12").
- Press the tiles firmly into position by Twisting Action.
- Press the tile gently with help of Wooden Hammer to make uniform tile surface.
- Clean the Tile surface with wet Cloth.
- WAIT**
24 HR

For Foot Traffic wait up to 24 Hrs.
- GROUT**

After 24 Hrs you can do the grouting.

* The POWDER: LIQUID ratio may vary according to the job conditions

VX-2 White Gives extra Whiteness to white marble/stones and tiles

HIGH PERFORMANCE WHITE COLOR PREMIUM TILE ADHESIVE FOR WALL & FLOOR TILES AND MARBLES

Product Description:

VX2 White is polymer modified white cement based premium tile adhesive specially designed for heavy duty applicants for fixing vitrified tiles & large size tiles on floor surfaces. This highly flexible adhesive also has an excellent waterproofing ability. When properly applied, it takes care of hollowness problem. Highly recommended for light base internal wall & floor tile.



Pack Size: 20Kg.

Color: White

Shelf Life:

1 year in dry unopened bags.

Coverage (in sq. mtr.)*

4-5 Sq. mtr. / 20 Kg bag at 3 mm thickness.

Applications:

White color adhesive specially recommended for all kinds of Wall & floor

Advantages:

- ▶ Ready to use. Needs only mixing with water.
- ▶ Also suitable for Marbles and tile on tile application.
- ▶ Can also we use for internal wall tile.
- ▶ Saves time as floors are ready to be used after 24 hours.
- ▶ Excellent adhesion & low shrinkage.
- ▶ Very effective for light base tiles & Marbles.
- ▶ Protect light base tiles from discoloration.

*Coverage may vary according to evenness/level of Floor/Wall


VX-2 White


Technical Data: (Type-2)


Density	1.7 kg/litre Approx.
Pot Life	3-4 hrs Approx.
Open Time	23 minutes Approx.
Adjustability	22 minutes Approx.
Setting Time	Approx. 1 Day
Full Strength	Approx. 28 Days
Shear Strength	Not less than 1.25 N/mm Sq.
Tensile Strength	Not less than 1 N/mm Sq.




Method of Application:


- 


1 Remove all Dust, Water, Oil & Sealers from Surface/ Substrate.
- 


2 Add 5 to 6* ltrs water in-to empty bucket.
- 


3 Add 20 Kg **VX2** White Adhesive in-to water and mix it till attains Uniform Paste.
- 


4 **WAIT**
5-10 MIN


Slake the Material for 5 to 10 minutes.
- 


5 Again Mix the material then take the material on notch trowel.
- 

6 Use flat side of the trowel and spread the adhesive uniformly.
- 

7 Comb the adhesive with the help of Notch trowel.
- 


8 Spread the material backside of the tile also (If tile size is More than 12"X12").
- 

9 Press the tiles firmly into position by Twisting Action.
- 

10 Press the tile gently with help of Wooden Hammer to make uniform tile surface.
- 

11 Clean the Tile surface with wet Cloth.
- 

12 **WAIT**
24 HR

For Foot Traffic wait up to 24 Hrs.
- 

13 **GROUT**

After 24 Hrs you can do the grouting.

* The POWDER: LIQUID ratio may vary according to the job conditions

EX-5

HEAVY DUTY PREMIUM TILE ADHESIVE FOR INTERIOR & EXTERIOR WALL & FLOOR TILES

Product Description:

When performance matters, professionals choose technically advanced solution for excellent adhesion. EX-5 is a high strength polymer modified premium tile adhesive. EX-5 is specially designed for heavy duty tile application. It has superior strength and is ideal for wall cladding tiles, large format vitrified & ceramic tiles on internal & external floors.



Features

- ▶ Simply mix with water and it is ready to use.
- ▶ No curing required.
- ▶ Water resistant.
- ▶ High Strength Adhesive.



Pack Size: 20Kg.

Color: Grey

Shelf Life:

1 year in dry unopened bags.

Coverage (in sq. mtr.)*

4-5 Sq. mtr. / 20 Kg bag at 3 mm thickness.

Applications:

Suitable for exterior & interior surfaces in residential buildings for both floor & wall surfaces.

Advantages:

- ▶ Suitable for all types of tiles for both interior & exterior solution.
- ▶ Excellent tensile & shear adhesion.
- ▶ Heat & weather resistant.
- ▶ Thermal Insulation.

* Not recommended for Height above 30 ft and Tile size bigger than 45x90 cm

** Fastening is recommended to install Slabs/ Big Size Tiles over Facade on High rise walls

*Coverage may vary according to evenness/level of Floor/Wall


EX-5


Technical Data: (Type-3)


Density	1.79 kg/litre Approx.
Pot Life	3-4 hrs Approx.
Open Time	25 minutes Approx.
Adjustability	23 minutes Approx.
Setting Time	Approx. 1 Day
Full Strength	Approx. 28 Days
Shear Strength	Not less than 1.25 N/mm Sq.
Tensile Strength	Not less than 1 N/mm Sq.



Method of Application:


- 

1 Remove all Dust, Water, Oil & Sealers from Surface/ Substrate.
- 

2 Add 5 to 6* ltrs water in-to empty bucket.
- 


3 Add 20 Kg **EX5** Adhesive in-to water and mix it till attains Uniform Paste.
- 


4 **WAIT**
5-10 MIN


Slake the Material for 5 to 10 minutes.
- 

5 Again Mix the material then take the material on notch trowel.
- 


6 Use flat side of the trowel and spread the adhesive uniformly.
- 

7 Comb the adhesive with the help of Notch trowel.
- 


8 Spread the material backside of the tile also (If tile size is More than 12"X12").
- 

9 Press the tiles firmly into position by Twisting Action.
- 

10 Press the tile gently with help of Wooden Hammer to make uniform tile surface.
- 

11 Clean the Tile surface with wet Cloth.
- 

12 **WAIT**
24 HR

For Foot Traffic wait up to 24 Hrs.
- 

13 **GROUT**

After 24 Hrs you can do the grouting.

* The POWDER: LIQUID ratio may vary according to the job conditions **For exterior elevation tiles, add latex base adhesive mixture*

Comparison between Traditional Cement Sand Mortar, Non branded Tile adhesive vs. Kajaria premium Tile Adhesive

Traditional cement Sand Mortar /non branded tile adhesive	Kajaria Premium Tile Adhesive
Slow Fixing	Faster Fixing
Curing Required	Curing Not Required
Poor Workability	Good Workability
Typical Application	Easy to Apply
Short Open Time And Adjustability	Adequate Open Time and Adjustability
Poor Water Retention	Good Water Retention
Very Low Bond Strength	High Bond Strength
Hollowness Problem	No Hollowness Between Tile and Substrate
Required Bed Thickness 20-30 Mm	3-6mm Thickness Adequate Mostly
Add More Weight and Thickness	Reduced Weight & Thickness of Structure
Not Water Resistant	Water Resistant
Chipping Required	Can be Use Directly on Any Surface
Stains, Seepage, & Discolouration Is Possible.	Resistant to Stains, Seepage & Discolouration

*not suitable for surfaces subject to vibration like plywood, metal, glass, gypsum boards, fibre cement slabs & smooth pre-fabricated concrete.



IS 15477 : 2019

**Table 1 Minimum Tensile and shear Adhesion Strength of Adhesive
(Clauses 5.1 and 5.2)**

SI.No	CHARACTERISTIC	REQUIREMENT N/MM ²				
		TYPE 1	TYPE 2	TYPE 3	TYPE 4	TYPE 5
1.	Tensile Adhesion strength, Min: a) Dry condition b) wet condition	0.5	1.0	1.5	1.5	2.0
		–	1.0	1.0	1.0	–
2.	Shear Adhesion strength, Min: a) Dry condition b) Heat aging condition c) wet condition	1.0	1.25	1.5	1.5	6.0
		--	1.0	1.0	1.0	3.0
		--	1.0	1.0	1.0	--

SI.No	CLASSIFICATION	TRANSVERSE DEFORMATION
1	DEFORMABLE ADHESIVE, S1	≥ 2.5mm, < 5.0 mm
2	HIGHLY DEFORMABLE ADHESIVE, S2	≥ 5.0 mm

KE-100

PREMIUM EPOXY GROUT

Product Description:

Kajaria KE-100 is a Stain free Epoxy grout for floors & Walls. It is a color fast, water & chemical resistant & 100 % solid epoxy grout suitable for Ceramic tiles, Vitrified tiles, marbles and stones, especially in stain prone areas such as kitchens and washrooms (residential & commercial installations). It is non shrinking, fast curing efflorescence free grout. It is ideal for installation where high strength mildew joints are required. It can be steam cleaned and is ideal for green buildings. Available in 1Kg and 5kg pack.



Features

- ▶ Simply mix Hardener, resin & filler.
- ▶ Excellent under high temperature conditions.
- ▶ Beautiful Joints as no effect of pigments.
- ▶ Protection against Stains.
- ▶ Time Saving.
- ▶ Suitable for joints between 2-12 mm .
- ▶ Available in 20 colors.

Pack Size:

	1 Kg.	5 Kg.
Resin	0.2 Kg.	1 Kg.
Hardner	0.08 Kg.	0.4 Kg.
Coated	0.720 Kg.	3.6 Kg.

Shelf Life: 1 year in dry unopened bags.

Applications:

Residences, Kitchens, bathrooms, swimming pools, fountains, hospitals, restaurants, showroom, industrial areas & high traffic areas.

Advantages:

- ▶ Water Resistant
- ▶ Stain free grout for floors & walls.
- ▶ Available in range of colors.
- ▶ Chemical & Bacterial resistant.
- ▶ Enhances look of walls & floors.
- ▶ Easy to apply-Smooth & Creamy.
- ▶ Easy to clean.
- ▶ Uniform color resist blotching.



KE-100

Coverage Chart*

Joint Width in mm	Tile Size (Length * Breadth * Thickness in mm)									
	100 x 100 x 3	150 x 150 x 4	200 x 150 x 5	150 x 300 x 6	300 x 300 x 6	450 x 300 x 7	600 x 450 x 8	600 x 600 x 8	600 x 900 x 11	900 x 900 x 12
2	4.38	4.93	4.51	4.38	6.57	6.76	8.45	9.86	8.61	9.8
3	2.92	3.28	3.00	2.92	4.38	4.51	5.63	6.57	5.74	6.57
4	2.19	2.46	2.25	2.19	3.28	3.38	4.22	4.93	4.30	4.93
6	1.46	1.64	1.50	1.46	2.19	2.25	2.81	3.28	2.87	3.28
8	1.09	1.23	1.12	1.09	1.64	1.69	2.11	2.46	2.15	2.46
10	0.87	0.98	0.9	0.87	1.31	1.35	1.69	1.97	1.72	1.97
12	0.73	0.82	0.87	0.73	1.09	1.12	1.40	1.64	1.43	1.64



















***Note:**

Coverage in Sq. Mtr per 1 kg. Material.
 Specific gravity- 1.9.
 As per the actual site the consumption vary accordingly.
 These figures are for indicative purpose.

* Know the material needed for your site

Grout Colours

Plain

	Crema		Aqua
	Champagne		Alpine Blue
	Ivory		Rose
	Autumn Yellow		Bottle Green
	Granilia Grey		Marble Beige
	Almondo		Steel Grey
	Fiero		Cobalt Blue
	Brown		Chocolate
	Copper Brown		Black

Elite Plain

	Blanco Nieve		Turquoise Blue
---	--------------	--	----------------

PREMIUM UNSANDED GROUT

PREMIUM UNSANDED GROUT

Product Description:

Kajaria Premium Unsanded Grout is a superior quality grout. It consists of a carefully prepared blend of cement, chemical additives and fillers. It is easy to install – just mix with water/grout admix and use. For best results, use with Kajaria Premium Grout Admix KGA-01. It is ideal for both floors and walls applications.

Kajaria Premium grouts are suitable for a vast array of tile types and applications, including natural stone, porcelain, conglomerate and ceramic tiles.



Pack Size: 1Kg.

Shelf Life:

1 year in dry unopened bags.

Applications:



















Used for filling tile joints with width 1mm to 3 mm in both interior and exterior areas for ceramic & vitrified tiles. For best results, use with Kajaria Premium Grout Admix KGA-01.

Advantages:


- ▶ Water resistant.
- ▶ Improved efflorescence control.
- ▶ Smooth finish.
- ▶ Weather resistant.
- ▶ Easy maintenance.
- ▶ Non-shrinking.
- ▶ Non-cracking.
- ▶ Easy application and clean up.
- ▶ Available in 20 colors.

Grout Colours

Plain

	Crema		Aqua
	Champagne		Alpine Blue
	Ivory		Rose
	Autumn Yellow		Bottle Green
	Granilia Grey		Marble Beige
	Almondo		Steel Grey
	Fiero		Cobalt Blue
	Brown		Chocolate
	Copper Brown		Black

Elite Plain

	Blanco Nieve		Turquoise Blue
---	--------------	--	----------------

Coverage

Coverage (in sq. ft.): approximate coverage/10 Kg. grout.

Tile Size x thickness (in mm)	1 mm	2 mm	3 mm
100 x 100 x 3	1430	720	480
150 x 150 x 4	1610	810	540
200 x 150 x 5	1470	740	490
200 x 200 x 5	1720	860	570
200 x 300 x 6	1720	860	570
300 x 300 x 6	2150	1070	710
400 x 400 x 6	2860	1430	950
450 x 450 x 7	2760	1380	920
500 x 500 x 8	2680	1340	890
600 x 600 x 8	3210	1610	1070

TILE CLEANER

Product Description:

Kajaria Tile Cleaner TC1 is a fast acting acid based cleaner for regular cleaning of dirt and stains on tile surface, designed for daily maintenance of tiles.

Features

- ▶ For ceramic & vitrified tiles.
- ▶ Removes tough stains.
- ▶ Use directly or add water.
- ▶ Ideal for interior & exterior.
- ▶ Anti Germs & Anti Stains.



Pack Size:

750 ml

Carton of 14 Bottles
10500 ml

Shelf Life: 1 year

Applications:

- ▶ Dilute to the correct ratios as required. Use 1 part of cleaner to 4 parts clean water
- ▶ Heavily soiled areas may require an undiluted solution to be applied
- ▶ Always test initially on a small areas
- ▶ Liberally apply the solution to the floor area to be cleaned. Leave in contact with area for approx. 1-2 minutes
- ▶ Using a brush or a scrub pad thoroughly scrub the area treated with the solution.

Caution:

- ▶ Please note that this is an acidic based cleaner and hence care should be taken while using the same.
- ▶ Please wear hand gloves, nose cover and wear eye protection before and while using the product.

KEEP OUT OF REACH OF CHILDREN




CHECK GENUINEITY OF KAJARIA ADHESIVE PRODUCTS

— QR CODE
TO IDENTIFY
GENUINE PRODUCT



— MULTI-DIMENSIONAL
HOLOGRAPHIC
MATERIAL

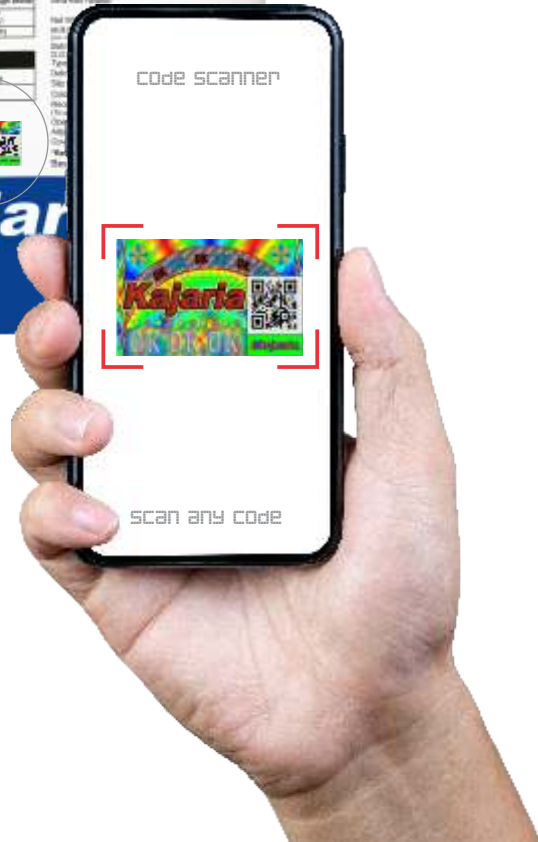

We have given a hologram QR code on all adhesive bags and grouts which can be scanned by phone camera. Please check the genuinity of the product. In case you find any duplicity in the product, please call us on 8076890030

NORTH

CHANDIGARH :
 SCO 17, 1st Floor
 Sector-7C , Madhya Marg, Chandigarh.
 Phones : 91-172-4631418, 4631415
 E-mail : chandigarh@kajariaceramics.com

DEHRADUN :
 485, Dharampur, Haridwar Road, Dehradun
 Phone : 0135-2675329
 E-mail : dehradun@kajariaceramics.com

JAMMU :
 Satyam Road, Trikuta Nagar,
 Jammu - 180012, Jammu and Kashmir
 Phone - +91-191 247 6300

JAIPUR :
 Ground Floor, Nidhi Kamal Tower,
 Plot No 37-38 B, Barwara House,
 Ajmer Road, Jaipur - 302006, Rajasthan
 Phone : 0141-4910941, 2220244
 E-mail : jaipur@kajariaceramics.com

LUDHIANA :
 Dhanraj Complex, Fourth Floor,
 Near P.A.U. Gate No. 2, Ferozpur Road
 Ludhiana-141001, Punjab
 Phone : +91-161-4649002
 E-mail : ludhiana@kajariaceramics.com

LUCKNOW (Regional Office)
 Office Area No. 818, 8th Floor, Cyber Heights,
 Vibhuti Khand, Gomti Nagar,
 Lucknow - 226010 (U.P.)
 Phone : +91-9918002487

VARANASI :
 Varanasi Trade Centre, Plot No.154/2A,
 1st Floor, Near Income Tax Office
 Maqbool Alam Road, Varanasi- 221002
 Phone : 0542-2500483
 E-mail : varanasi@kajariaceramics.com
 Mob.: 9005092402

SOUTH

BANGALORE :
 Farah Icon, 119 First Floor,
 Opp. New Pass Port Kendra, Lalbagh Road,
 Bangalore – 560 027, Karnataka
 Phones : 08041440019 / 20 / 30
 Mob.: 9341237537

CHENNAI :
 Fagun Chambers, Old No: 7,
 New No: 26A/2, 1st Floor, Ethiraj Salai,
 Egmore , Chennai - 600008, Tamil Nadu
 Phones : 044-42691094/ 28264990
 E-mail : chn@kajariaceramics.com

SOUTH

COCHIN :
 MN Square, 2nd Floor, 549/2,
 Near Gold Souk Grande
 NH Bypass, Vyttila, Cochin- 19, Kerala
 Phones : 0484-2912000
 E-mail : coc@kajariaceramics.com

COIMBATORE :
 1st Floor, 57, Cowley Brown Road,
 Near Central Library, R.S.Puram ,
 Coimbatore - 641002, Tamil Nadu
 Phones : 0422-4350801/4350803
 E-mail : coimbatore@kajariaceramics.com

HYDERABAD :
 Uma Aishwarya House, H.No 8-2-502/1/AG,
 Road No. 7, Banjara Hills,
 Hyderabad - 500034, Telangana
 Phone : 040 - 66106058
 Mob.: 9000005392
 E-mail : hyderabad@kajariaceramics.com

VIJAYWADA :
 61-3/4-1, 1st Road, Geetha Nagar,
 Beside SBI Bank, NH-5, Balaji Nagar,
 Krishna Lanka, Vijaywada-520013, (A.P.)
 M: 9000015173

CENTRAL

RAIPUR (Regional Office)
 Shop No. 507&508, 5th Floor,
 Lalganga Business Park, NH-43 ,
 Pachpedhi Nak, Raipur-492001, Chhattisgarh
 Phone : +91 7714060427

INDORE (Regional Office)
 S.A. Tower, 1st Floor, 13/3 New Palasia,
 Opp. Arya Samaj Building
 Indore - 452001, Madhya Pradesh
 Phone: 0731- 4068839, 73140 68839

WEST

AHMEDABAD (Regional Office)
 City Centre-2, Office No-504,
 5th Floor, Nr. Sukan Mall Cross Road,
 Science City Road, Sola,
 Ahmedabad, Gujarat - 380060
 Phone: 9724340881

MORBI
 NH 8A, Anand Nagar
 Morbi, Gujarat - 363642
 Mob.:7046689961

WEST

MUMBAI :
 B1 - 307, Boomerang, Chandivali Farm Road,
 Near Chandivali Studio, Off Saki-vihar Road,
 Andheri (E), Mumbai – 400072
 Phone : 022-61433100
 E-mail : mum@kajariaceramics.com

PUNE :
 6th Floor, 601, Dsk Gandharva Heights,
 Ganeshkhind Road, Shivajinagar
 Pune - 411005, Maharashtra
 Phone: 020 6647 1600

EAST

PATNA (Regional Office)
 'ANCHAL', House No. - 15, Ground Floor
 Justice Narayan Path, Nageswar Colony
 Patna - 800001, Bihar
 Phone - +91 93347 91993

KOLKATA (Regional Office)
 Tirupati Plaza, 2nd Floor 74/2,
 Acharya Jagdish chandra Bose Road,
 Kolkata -700 016, West Bengal
 Phone - +91-33-40231111

Kajaria

INDIA'S NO. 1 TILE COMPANY

For Trade Enquiries, please contact
Dinesh Kumar, Mob. 9315902326
Email: dineshkumar-qc@kajariaceramics.com


Dealer Stamp

Kajaria Ceramics Limited

Corporate Office: J1/B1 (Extn.), Mohan Co - op Industrial Estate, Mathura Road, New Delhi - 110044, Ph.: +91-11-26946409

Regd Office: SF-11, Second Floor, JMD Regent Plaza, Mehrauli Gurgaon Road, Village Sikanderpur Ghosi, Gurgaon-122001, Haryana, Ph.: +91-0124-4081281

CIN No. : L26924HR1985PLC056150, E-mail: northsales-ceramicsdivision@kajariaceramics.com, Web.: www.kajariaadhesives.com

 <https://www.facebook.com/KajariaAdhesives>  <https://www.instagram.com/kajaria.adhesives>, Tollfree : 1800-309-309

Download Kajaria App

